

Bar X Ranch

Five-Lot Feasibility Portfolio

Land acquisition and a five-bedroom build on five vacant lots in Bar X Ranch, unincorporated Brazoria County, Angleton, Texas 77515 — assessed for buildability, cost, flood and windstorm exposure, and what it is actually like to live there.

WHAT IS NEW IN THIS EDITION

Every one of the five lots has now been **identified in the county record** — parcel ID, legal description, acreage of record, appraised value, deed reference — and checked against the county's own flood, LiDAR elevation, taxing-district and subdivision layers, the USDA soil survey, and the recorded deed restrictions. This edition adds **true-scale plans and terrain sections** for each lot (§12–17) and a chapter on **what living here is actually like** (§25–29). Nineteen open questions are closed, and **four conclusions change**: the FIRM panel, the governing base flood elevation, which lot is the best buy, and whether you can keep poultry.

PREPARED FOR	Mohsin Chowdhury
DATE	17 September 2026
VERSION	4.2 — supersedes v2.0 (10 Sep 2026) and the original generated portfolio
SUBJECT	PID 183667 · 183367 · 186219 · 183332 — Bar X Ranch Sections 1, 2 and 16
ASKING PRICE	\$334,500 for 6.32 acres of record across all five lots
BASIS	Primary regulation, Brazoria County public GIS, FEMA, TCEQ, TDI, TWIA, USDA soil survey, USGS 3DEP and hydrography, US Census ACS 2024, ERA5 climate reanalysis
STATUS	Desktop study. No survey, no soil test, no written county flood determination.

THE NUMBER THAT CHANGED THE ENGINEERING

The nearest **published base flood elevation** on the effective FIRM is **28 ft NAVD88**, not the 24 ft assumed by both earlier editions. County LiDAR puts natural ground at these parcels at **24–28 ft**. Brazoria County requires a finished floor 24 in above BFE — so the target is **30 ft**, which is **2 to 6 ft above existing grade**. Building at grade is not an option on any of the five. See §11.

THE FINDINGS THAT CHANGED THE ANSWER

Three of the five lots sit on **Pledger clay** — a 70% clay shrink-swell vertisol, hydrologic group D — and two on **Asa silty clay loam**, a well-drained prime-farmland loam (§18). And the pad, now **calculated per lot** rather than estimated, ranges from **\$20,400 on Lot 2 to \$58,200 on Lot 4** at mid-case (§22). Together those outweigh every asking-price gap in the portfolio.

AND THE FINDING YOU NEED BEFORE YOU DO ANYTHING ELSE

The recorded restrictions allow one dwelling, one garage and **one horse barn** per lot, and bar **“livestock of any kind other than house pets”** apart from horses. **Chickens and ducks are very unlikely to be permitted**. See §1 and §19.

This document is a desktop screening study prepared from published regulation and public records. It is not a survey, an engineering opinion, a flood determination, insurance advice, legal advice or an appraisal. Read the disclaimer on the final page before relying on any figure in it.

Contents

1 · Verdict	3	20 · Septic	28
2 · Snapshot	4	21 · Cost	29
3 · Parcel record	5	22 · The pad & fill	30–31
4 · Value	6	23 · Carrying cost	32
5 · Combined map	7	24 · Wind & insurance	33
Plate 1 · Satellite view	8	25 · Climate	34
6 · Lot 1 — 1127 Saddle Horn Bend	9–10	26 · Hazards	35
7 · Lot 2 — 336 Wagon Wheel Trail W	11	27 · Services	36
8 · Lot 3 — Lot 29 Broken Arrow Trail	12–13	28 · Schools & going out	37
9 · Lot 4 — 750 Wagon Wheel Trail	14–15	29 · Coast & outdoors	38
10 · Lot 5 — 808 Wagon Wheel Trail	16–17	30 · Neighbourhood	39
11 · Flood	18–19	31 · Amenities & fishing	40–42
12 · Terrain method	20	32 · Scorecard	43–44
13 · Terrain — Lot 1	21	33 · Corrections	45
14 · Terrain — Lot 2	22	34 · Next steps	46
15 · Terrain — Lot 3	23	Sources & sign-off	47
16 · Terrain — Lot 4	24	Appendix A · Engagement brief	48–49
17 · Terrain — Lot 5	25	Appendix B · County correspondence	50–51
18 · Soil	26	Appendix C · Draft e-mails	52–57
19 · Restrictions	27	Appendix D · Seller photography audit	58–59

HOW TO READ THIS DOCUMENT

Every material figure carries a confidence chip. They are not decoration — the chips are the point of the document, because the original portfolio presented estimates and errors in the same typeface as facts.

VERIFIED traced to a primary or official source and reproduced here **UNVERIFIED** from listing copy or a superseded edition; not confirmed

ESTIMATE a ranged planning figure, not a quote **NEW IN V3** established for the first time in this edition

WHERE THE NEW EVIDENCE CAME FROM

Brazoria County publishes its GIS as an open ArcGIS service. This edition queries it directly for the parcel record, the FEMA flood layers, the LiDAR elevation contours, the taxing districts and the recorded subdivision instruments, then cross-checks the results against FEMA, TCEQ, TDI, TWIA, the US Census and OpenStreetMap. Every query is written down in docs/EVIDENCE.md so it can be re-run and disputed. The parcel polygons are committed to the repository as data/parcels.geojson.

THREE THINGS THIS DOCUMENT STILL CANNOT TELL YOU

- **The soil class.** It decides whether the septic system costs \$8,000 or \$25,000 — the single largest controllable cost swing in the project — and it can only be answered by a site and soil evaluation on the specific lot.
- **The distance to three-phase power at each lot.** \$0 or \$25,000.
- **The site-specific BFE in writing.** §11 narrows it hard, but only the Brazoria County Floodplain Administration can issue the determination a lender and an insurer will accept.

1 • Verdict and recommendation

You asked which one lot to buy and build on, weighted for gardening, hobby farming, scenery, a good developed neighbourhood, quick access to amenities and safety from flood and storm. Two findings in this edition decide it, and neither was in any earlier version.

READ THIS BEFORE ANYTHING ELSE — POULTRY LOOKS PROHIBITED

The recorded Bar X Ranch declaration of restrictions permits, on any lot, exactly **three structures**: one single-family dwelling, a garage, and **one horse barn** of no more than 30 × 25 ft (\$3.01). And §3.15 provides that “**no livestock of any kind other than house pets of reasonable kind and number may be kept on any Lot**”, adding horses as the one express exception, on an acreage formula.

Chickens and ducks are neither house pets nor horses. On the face of the instrument, keeping them would need a written variance from the committee for the structure *and* a departure from the livestock clause. If poultry is non-negotiable for you, the honest answer is that **Bar X Ranch is the wrong subdivision** — buy unrestricted acreage in Brazoria County instead. Horses, unusually, are welcome: 1 per 32,670 sq ft, 2 per 42,000 sq ft.

IF YOU BUY HERE ANYWAY, BUY LOT 2 — 336 WAGON WHEEL TRAIL W

It sits on **Asa silty clay loam**, the better of the two soils and genuinely good garden ground; its best building spot is at **28.8 ft**, the highest in the portfolio, so it needs a lift of **eight inches** where the others need three to five feet; and it is the **cheapest lot at \$45,000**.

Getting Lot 2 to build-ready — land, pad, septic and foundation — costs about **\$65,000**. The same exercise is **\$109,000 on Lot 3, \$131,000 on Lot 1 and \$139,000 on Lot 4**. What you give up is room: 1.00 acre of record, 187 ft wide, and the shortest water frontage of the five.

THIS IS A CHANGE FROM THE PREVIOUS EDITION, AND HERE IS WHY

v3.0 recommended Lot 1 on space and soil. Calculating the pad properly (\$22) rather than carrying a generic \$12k–\$45k range put a **\$66,000 gap** between the two on cost-to-build-ready. Lot 1 remains the better lot to *live* on — 1.95 acres and bayou frontage against 1.00 acre and a pond corner. The question is now explicit: **is the extra 0.95 acre and the bayou worth about \$66,000 to you?** If yes, buy Lot 1 and this document supports it. If you hesitate, buy Lot 2.

Scored against your brief. Soil from USDA SSURGO; ground and fill from a DEM grid inside each boundary (§22).

RANK	LOT	GARDEN SOIL	ROOM	SCENERY	FLOOD HEADROOM	BUILD RISK	PRICE
1	336 Wagon Wheel Trl W 1.00 ac · PID 183367	Asa loam — well drained, prime	1.00 ac (0.87 by polygon)	Short frontage on a 12.6 ac pond	28.8 ft — 0.7 ft of fill	Low shrink-swell	\$45,000
2	1127 Saddle Horn Bend 1.95 ac · PID 183667	Asa loam — well drained, prime	1.95 ac	Mill Bayou, ~half the perimeter	25.3 ft — 4.2 ft of fill	Low shrink-swell	\$82,500
3	Lot 29 Broken Arrow Trl 1.30 ac · PID 186219	Pledger clay — 70% clay	1.30 ac	Good frontage, 12.6 ac pond	26.5 ft — 3.0 ft of fill	Vertisol — high movement	\$49,000
4	750 Wagon Wheel Trl 1.00 ac · PID 183332	Pledger clay — 73% clay	1.00 ac	Flag Lake, 101 acres	24.3 ft — up to 5.2 ft of fill	Vertisol + abuts a dam	\$58,000

WHY THE CHEAPEST LAND IS NOT THE ANSWER FOR YOU

On price alone Lot 29 wins outright — \$37,692 an acre and the only lot asking *below* the county's appraisal. This edition would recommend it to an investor.

But it sits on **Pledger clay**: 70% clay, a permeability of 0.21 µm/s, hydrologic group D, and a linear extensibility of **19** — a shrink-swell vertisol. That is the ground that cracks slabs, forces an aerobic septic system, ponds after rain and gardens only in a two-week moisture window. The \$10,000 you save on land you give back on the septic and the foundation, and you garden on it for the next thirty years. See §14.

THE CASE FOR PAYING UP FOR LOT 1

You garden. Lot 1 is **1.95 acres** against Lot 2's 1.00, on the same excellent Asa loam, with mature trees and roughly half its perimeter on Mill Bayou. That is the difference between a vegetable plot and an orchard, and it is the one thing on this list you cannot buy later.

The bill for that: **\$37,500 more land and about \$28,000 more pad**. It is also the closest of the five to State Highway 35, at 480 ft, though 1.95 treed acres absorb a good deal of that.

AND DO NOT BUY THE SET

Five vacant lots cost **\$5,850–\$6,360 a year** to hold and return nothing — \$17,500–\$19,100 over a three-year window, on a portfolio already asking 30.6% above the county's appraised value. The build needs one lot; the other four add carry, not capability.

2 · Portfolio snapshot

LAND, ALL FIVE LOTS

\$334,500

6.32 ac of record · \$52,927 per acre

COUNTY APPRAISED VALUE

\$256,180

asking a +30.6% premium

VERIFIED

ALL-IN, ONE LOT BUILT

\$505k–980k

land + site + 5BR house

ESTIMATE

ANNUAL CARRY, FIVE VACANT LOTS

\$5.9–6.4k

tax + POA + mowing

RATES CORRECTED

SITE FACTS THAT NOW HOLD FOR ALL FIVE LOTS — CHECKED PARCEL BY PARCEL

FEMA FIRM panel **48039C0420K**, effective **30 December 2020** **CORRECTED FROM 48039C0605K** · all five mapped **Zone AE**, SFHA = true, with **no static BFE** on the polygon (the BFE varies and must be read from the profile) **VERIFIED** · nearest published BFE line **28 ft NAVD88** at every lot **NEW** · finished floor required at **BFE + 24 in** **VERIFIED** · school district **Columbia-Brazoria ISD** for all five **VERIFIED** · **no** hospital district, **no** junior-college district, **no** MUD, **no** city limits **NEW** · water and sewer are **private well plus on-site septic** · **no** natural gas · TDI windstorm zone **Inland I, 120 mph** **NEW**.

THE SHAPE OF THE MONEY

Land, one lot	\$45k–82.5k
Pre-construction / site works	\$26k–108k
The house itself, 2,400–2,800 sq ft	\$420k–700k
Insurance, first year once built	\$5k–9.5k
Annual carry while vacant, ×5	\$5.9k–6.4k

Land is **9–16%** of the all-in cost of putting a family into a house here. That is the single most important proportion in this document: the lot choice matters far less to the budget than the soil class, the pad and the distance to power — and all three of those are lot-specific unknowns that a \$600 soil test and three phone calls would resolve.

COSTS THE ORIGINAL PORTFOLIO OMITTED ENTIRELY

- The house — \$420,000 to \$700,000
- The septic system itself — \$8,000 to \$25,000
- Windstorm insurance — TWIA average \$2,541/yr
- Property tax — the largest carry line
- Electric service extension — up to \$25,000
- Engineered pad and fill — now **certain**, not optional (\$11)
- Propane, water treatment, culvert, clearing

COSTS THIS EDITION REMOVES

- **Angleton-Danbury Hospital District tax** — the lots are in no hospital district at all, so 0.074685 per \$100 comes out of the model
- **Angleton Drainage District tax** — the lots sit in county-wide drainage, not the Angleton district, so 0.052816 per \$100 comes out too
- **Brazosport / Alvin junior-college tax** — neither district reaches these parcels

Together those three lines were overstating the annual tax by roughly \$260–\$300 on the portfolio.

3 · The parcel record — established for the first time

Neither earlier edition contained a single parcel identifier. Every lot is now tied to its Brazoria County Appraisal District record. This is the table that resolves the acreage disputes, the section numbers and the value question.

Brazoria County ArcGIS, general/Parcels/MapServer/1 (BCAD parcel data), retrieved 11 September 2026. NEW IN V3

LISTING NAME	PID / GEO ID	LEGAL DESCRIPTION OF RECORD	ACRES OF RECORD	GIS POLYGON	BOUNDING BOX (FT)	BCAD APPRAISED	DEED
1127 Saddle Horn Bend	183667 1534-0084-000	Bar X Ranch SEC 2 BLK 1 LOT 84 ACRES 1.95	1.95	2.000	316 × 460	\$65,030	2008-031507
336 Wagon Wheel Trail W	183367 1533-0167-000	Bar X Ranch LOT 167 ACRES 1.	1.00	0.872	424 × 187	\$36,000	V1523P212
Lot 29 Broken Arrow Trail	186219 1549-0029-000	Bar X Ranch SEC 16 BLK 1 LOT 29 ACRES 1.3	1.30	1.166	370 × 354	\$51,870	V268P248
750 Wagon Wheel Trail	183332 1533-0132-000	Bar X Ranch LOT 132 ACRES 1.	1.00	0.955	479 × 123	\$50,000	V1729P804
808 Wagon Wheel Trail	183331 1533-0131-000	Bar X Ranch LOT 131 ACRES 1.07	1.07	0.964	490 × 110	\$53,280	2007-000505

THIRTEEN OPEN ITEMS CLOSED

Parcel IDs and geo IDs for all five · legal descriptions · acreage of record for Lots 3 and 4 · the section number for Lots 2 and 4 · the recorded plat and restriction instrument for each section · the FIRM panel · the flood zone per parcel · the taxing districts · the school district · the jurisdiction · natural ground elevation · whether Lot 3 is waterfront · whether Lot 4 is 1.0 or 1.27 acres.

WHERE THE ACREAGE CLAIMS LANDED

LOT	EARLIER EDITIONS SAID	COUNTY RECORD SAYS	EFFECT
1127 Saddle Horn Bend	1.95 ac	1.95 ac — confirmed	None. The one acreage that was right.
336 Wagon Wheel Trl W	1.00 ac	1.00 ac of record, but the county polygon computes to 0.872 ac	Buildable area may be ~13% less than the deed implies. Survey it.
Lot 29 Broken Arrow Trl	1.0 ac "est."	1.30 ac	\$/acre falls from ~\$49,000 to \$37,692 . Best value in the portfolio.
750 Wagon Wheel Trl	1.0 ac or 1.27 ac — unresolved	1.00 ac. The 1.27 figure is wrong.	Confirms it as the dearest land per acre, by 28% over Lot 29.

TWO PER-LOT DIFFERENCES NOBODY HAD NOTICED

- **The five lots are not governed by one set of deed restrictions.** Lots 2 and 4 are in Bar-X Ranch Section 1 (plat 16/104, restrictions 1515/679, 1980, plus drainage easements 1712/500); Lot 1 is Section 2 (plat 16/119, restrictions 1532/471, 1980); Lot 3 is Section 16 (plat 17/219, restrictions 84-29/885, **1984**). Three different recorded instruments, so the "ACC Rev 2" quoted as a single controlling document across all five lots cannot be right. The minimum-square-footage and garage rules must be read per section.
- **Lot 2 alone sits inside the Baileys Prairie extraterritorial jurisdiction.** Baileys Prairie subdivision regulation reaches it; the other four answer only to the county.

Owner-of-record names are in the BCAD record and are deliberately not reproduced here. Search by PID at esearch.brazoriacad.org.

4 · Value — asking price against the county's own number

Pricing land per acre only works once the acreage is right, which is why neither earlier edition could do it. With the acreage of record established, two independent value tests are available: price per acre, and price against the appraisal the county already publishes for each parcel.

Asking prices from listing copy UNVERIFIED; acreage and appraised value from the BCAD parcel record VERIFIED

LOT	ASKING	ACRES OF RECORD	\$ PER ACRE	BCAD APPRAISED	PREMIUM	PREMIUM \$
1127 Saddle Horn Bend	\$82,500	1.95 ac	\$42,308	\$65,030	+26.9%	\$17,470
336 Wagon Wheel Trail W	\$45,000	1.00 ac	\$45,000	\$36,000	+25.0%	\$9,000
Lot 29 Broken Arrow Trail	\$49,000	1.30 ac	\$37,692	\$51,870	-5.5%	-\$2,870
750 Wagon Wheel Trail	\$58,000	1.00 ac	\$58,000	\$50,000	+16.0%	\$8,000
808 Wagon Wheel Trail	\$100,000	1.07 ac	\$93,458	\$53,280	+87.7%	\$46,720
Portfolio — the 5 listed lots	\$334,500	6.32 ac	\$52,927	\$256,180	+30.6%	\$78,320

PRICE PER ACRE, RE-RANKED

Lot 29 Broken Arrow	\$37,692
1127 Saddle Horn Bend	\$42,308
336 Wagon Wheel Trl W	\$45,000
750 Wagon Wheel Trl	\$58,000

The second edition ranked 1127 Saddle Horn Bend cheapest per acre. Correcting Lot 29 from an estimated 1.0 acre to its recorded 1.30 acres moves it to the front by 11%.

PREMIUM OVER COUNTY APPRAISAL

Lot 29 Broken Arrow	-5.5%
750 Wagon Wheel Trl	+16.0%
336 Wagon Wheel Trl W	+25.0%
1127 Saddle Horn Bend	+26.9%

An appraisal is not a market value, and Texas appraisals commonly lag a rising market. But a **27% premium** on one lot and a **discount** on another, inside the same subdivision and the same flood zone, is a negotiating fact.

HOW TO USE THIS AT THE NEGOTIATING TABLE

The five appraisals total **\$256,180** against a \$334,500 ask — a **+30.6%** premium. The county's appraisal is the number the seller pays tax on and the number that will be quoted back at them. On Lots 1, 2 and 4 there is a documented \$31,600 of daylight to argue about. On Lot 29 there is none — the seller is already under the county's number, which is a further reason to treat it as the pick rather than to push it.

A CAUTION ON THE POLYGON ACREAGES

The GIS polygon area computed from the county's own parcel geometry runs **3–13% below** the acreage of record on four of the five lots (Lot 1 is the exception, computing slightly above). Appraisal-district polygons are maintained for mapping, not for conveyancing, and the county says so. Do not treat either figure as survey-grade — but do notice that on Lot 2 the gap is large enough to matter to a septic layout on a 1-acre lot.

5 · All five lots on one interactive map

The map below is live Google Maps satellite imagery with all five parcels pinned in order. Use the buttons to switch between the five-lot route view, the whole subdivision, and each lot individually. Below it, the same five parcels are drawn as their **actual county boundary polygons** — which is what shows you where the water frontage really is.


Combined Google Maps satellite view of all five lots. Interactive in the browser version. The five parcel centroids are tabulated below; each is a live link.

THE SAME FIVE PARCELS AS RECORDED BOUNDARIES

Parcel centroids, WGS 84

LOT	LISTING NAME	LATITUDE	LONGITUDE	PID	OPEN LIVE
1	1127 Saddle Horn Bend	29.141219	-95.559141	183667	Google Maps · Street View
2	336 Wagon Wheel Trail W	29.140524	-95.541472	183367	Google Maps · Street View
3	Lot 29 Broken Arrow Trail	29.144419	-95.543456	186219	Google Maps · Street View
4	750 Wagon Wheel Trail	29.130575	-95.541987	183332	Google Maps · Street View
5	808 Wagon Wheel Trail	29.130342	-95.541850	183331	Google Maps · Street View

Plate 1 • Satellite view — all five lots

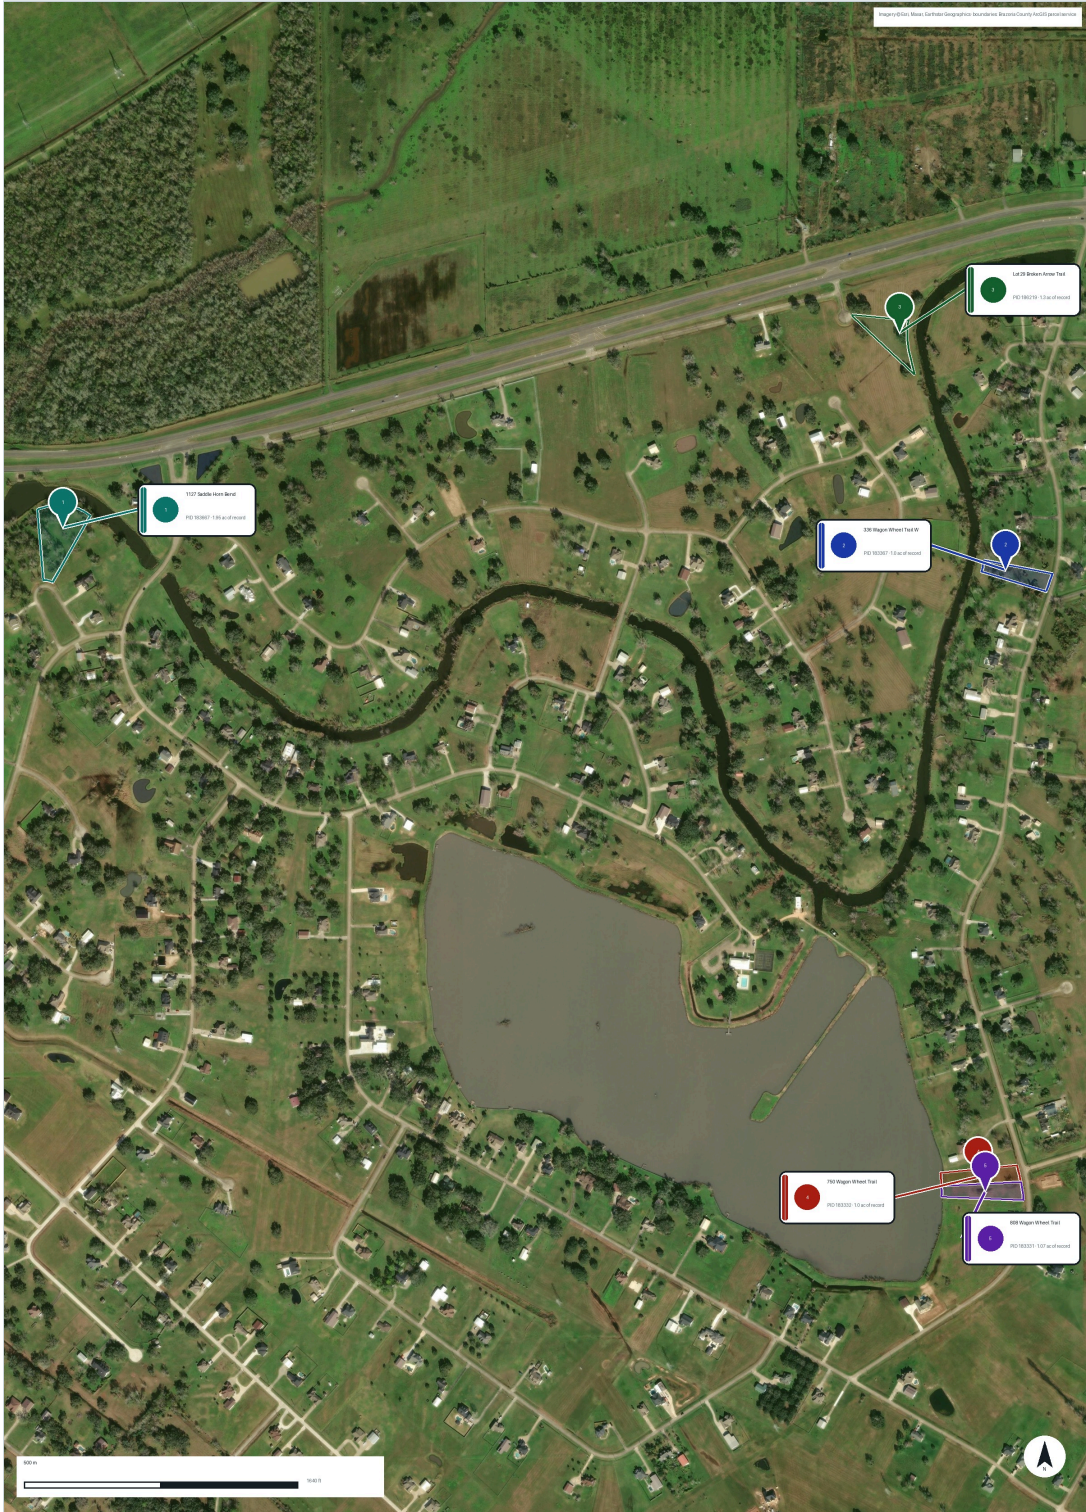

- | | | | | |
|--|--|--|--|--|
| 1 1127 Saddle Horn Bend
PID 183667 · 1.95 ac | 2 336 Wagon Wheel Trail W
PID 183367 · 1.00 ac | 3 Lot 29 Broken Arrow Trail
PID 186219 · 1.30 ac | 4 750 Wagon Wheel Trail
PID 183332 · 1.00 ac | 5 808 Wagon Wheel Trail
PID 183331 · 1.07 ac |
|--|--|--|--|--|

Recorded parcel boundaries from the Brazoria County ArcGIS parcel service, drawn over Esri World Imagery at 0.8 m per pixel and composed at 2,400 px for print. North is up; scale bar and north arrow are on the plate. **Basemap: Esri World Imagery** — imagery © Esri, Maxar and Earthstar Geographics, reproduced under Esri's attribution terms, and the same basemap the interactive boundary map on the previous page draws from. It is licensed for reproduction in a document like this one, which is why it is used here in preference to a consumer mapping tile service. A live Google satellite view of each parcel is one click away from the per-lot links in S6–S10.

1127 Saddle Horn Bend [ZILLOW](#)

Angleton, TX 77515 • Bar-X Ranch #2 • Block 1, Lot 84

ZONE AE **WATERFRONT — MILL BAYOU** **LARGEST — 1.95 AC**

\$82,500

\$42,308 per acre • 1.95 ac of record
+26.9% vs county appraisal



LEGAL	Block 1, Lot 84 • 1.95 ac of record	SOIL	Asa silty clay loam — well drained, prime farmland
SITUS OF RECORD	1127 SADDLE HORN BEND	WATER	Mill Bayou — a tree-lined stream corridor. Nearest mapped waterbody 395 ft.
DEED • PLAT • RESTRICTIONS	2008-031507 • 16/119 • 1532/471	WATER REGIME	Seasonal. Mill Bayou is classified intermittent in the national hydrography (NHD FCode 46003) — it does not flow year-round. Expect low or no flow late May to September , worst in July and August . The water nearer the boundary is the impounded 13-acre widening, which holds through the dry window though the level drops.
DIMENSIONS	bbox 316 × 460 ft • county polygon 2.000 ac	STOCKED?	No. Mill Bayou does not appear in TPWD's stocked water-body list, and it is not public water TPWD stocks. In an intermittent reach the fishery is whatever survives the isolated summer pools.
FLOOD	Zone AE • panel 48039C0420K, 30 Dec 2020	HIGHWAY JURISDICTION	0.09 mi (about 480 ft) south of State Highway 35 Unincorporated • no city limits or ETJ
NEAREST BFE LINE	28.0 ft NAVD88 , 1,594 ft off the parcel		
GROUND (LIDAR)	24–25 ft at the parcel		



- [Open in Google Maps](#)
- [Google Street View](#)
- [Zillow — search this address](#)
- [BCAD record — PID 183667](#)
- [LoopNet listing](#)


AERIAL PHOTOGRAPHY — SUPPLIED BY THE SELLER



The parcel outlined, looking north-east. Narrow at the street, the full width to the water.



Wider view. **State Highway 35** crosses the foreground and Mill Bayou wraps the lot in a meander.



Overhead. Tree cover across most of the parcel; exposed bayou banks at low water.

The wedge is unmistakable here: a point of frontage at the street and the whole width of the lot given to the bayou. Note two things the survey data could not show. **The bayou is running low and its banks are exposed mud** — consistent with the intermittent classification in the water-regime row above. And **the lot is densely treed**, so the clearing allowance in §21 belongs at the top of its range, and the tree cover constrains where a pad, a drainfield and its reserve can actually go.

MORE SELLER PHOTOGRAPHY — THE BAYOU AND THE HIGHWAY



AREA CONTEXT The bayou channel at close range from the north bank. Note the **bare, undercut mud margin** above the waterline — the wetted width is well below the channel width.



AREA CONTEXT The approach along **State Highway 35**. The measured 480 ft from Lot 1 to the carriageway is a distance you can see, and hear.

Neither frame carries the seller’s boundary outline, so both are captioned as area context rather than as pictures of Lot 84. The three outlined frames above are the ones that fix the parcel.

BEST FOR

Setback geometry. The extra acre is the only thing on offer here that actually solves the 5BR + drainfield + 100% reserve + well-spacing puzzle comfortably.

WATCH

Longest water frontage means the largest share of the lot is in the low ground near the channel, and the TCEQ 75 ft absorption setback bites along all of it. It also sits downstream of Bar X Development Dam (NID TX01759) on a Mill Bayou tributary.

VERDICT ON THIS LOT

Buy this one if the plan is a large house and you will pay for the pad.

336 Wagon Wheel Trail W [ZILLOW](#)

Angleton, TX 77515 • Bar-X Ranch #1 • Lot 167

[ZONE AE](#) [WATERFRONT](#) [LOWEST PRICE](#) [BAILEYS PRAIRIE ETJ](#)

\$45,000

\$45,000 per acre • 1.00 ac of record
+25.0% vs county appraisal



LEGAL	Lot 167 • 1.00 ac of record	SOIL	Asa silty clay loam — well drained, prime farmland
SITUS OF RECORD	336 WAGON WHEEL TRAIL	WATER	Unnamed 12.6-acre pond , 41 ft off the boundary. Shortest frontage of the five.
DEED • PLAT • RESTRICTIONS	V1523P212 • 16/104 • 1515/679	WATER REGIME	Impounded, so it holds. The 12.6-acre pond is a dammed water body, not a flowing reach — NHD routes an artificial path through it. It retains water through the summer deficit. The nearest free-flowing channel is intermittent and 1,297 ft away.
DIMENSIONS	bbox 424 × 187 ft • county polygon 0.872 ac	STOCKED?	Not by the state. The POA stocks its own two lakes; this pond is not a TPWD water.
FLOOD	Zone AE • panel 48039C0420K, 30 Dec 2020	HIGHWAY	0.37 mi south of State Highway 35
NEAREST BFE LINE	28.0 ft NAVD88 , 1,010 ft off the parcel	JURISDICTION	Unincorporated • Baileys Prairie ETJ
GROUND (LIDAR)	28 ft at the parcel		



[Open in Google Maps](#) [Google Street View](#) [Zillow — search this address](#) [BCAD record — PID 183367](#)

PHOTOGRAPHY — NONE AVAILABLE FOR THIS LOT

NO PHOTOGRAPH OF THIS PARCEL EXISTS IN THE MATERIAL SUPPLIED

The seller supplied **nine files under this address and not one is a photograph**. All nine are screen captures of phone apps — the Zillow listing card, an Apple Maps pin and a Risk Factor flood panel. They record what a website said about the lot, not what the lot looks like. **Lot 2 is the only parcel in the portfolio with no ground or aerial photography at all**, and the only visual evidence for it in this document is the NAIP aerial and the LiDAR terrain in §22. If you shortlist this lot, a site visit or a commissioned drone pass is not optional.

BEST FOR

Lowest cash outlay, and the highest buildable ground of the five at 28 ft — which is the single most valuable physical attribute in a Zone AE subdivision.

WATCH

The shape is the problem: 424 ft × 187 ft on 1.00 acre of record, and the county's own polygon computes to 0.872 acre. Fitting a 5BR footprint, a 2,250–4,500 sq ft spray field, a 100% reserve area and a well at 100 ft from the field on a 187 ft width is the tightest test in the portfolio. This is also the only lot inside the Baileys Prairie ETJ, so Baileys Prairie subdivision regulation reaches it.

VERDICT ON THIS LOT

Cheapest entry and the best ground, but prove the footprint fits before you bid.

Lot 29 Broken Arrow Trail

Angleton, TX 77515 • Bar-X Ranch #16 • Block 1, Lot 29

ZONE AE WATERFRONT — RECLASSIFIED BEST VALUE 1.30 AC


\$49,000

\$37,692 per acre • 1.30 ac of record
-5.5% vs county appraisal




LEGAL	Block 1, Lot 29 • 1.30 ac of record
SITUS OF RECORD	HIGHWAY 35
DEED • PLAT • RESTRICTIONS	V268P248 • 17/219 • 84-29/885
DIMENSIONS	bbox 370 × 354 ft • county polygon 1.166 ac
FLOOD	Zone AE • panel 48039C0420K, 30 Dec 2020
NEAREST BFE LINE	28.0 ft NAVD88 , 2,477 ft off the parcel
GROUND (LIDAR)	26 ft at the parcel (a 26 ft contour runs 3 ft from the centroid)

SOIL	Pledger clay — vertisol, hydrologic group D
WATER	The same 12.6-acre pond as Lot 2, 59 ft off, with about twice the frontage.
WATER REGIME	Impounded, so it holds. Same dammed 12.6-acre pond as Lot 2, and the same behaviour. Nearest intermittent channel 1,072 ft off.
STOCKED?	Not by the state. As Lot 2 — POA water, not a TPWD stocked water body.
HIGHWAY JURISDICTION	0.10 mi (about 530 ft) south of State Highway 35 Unincorporated • no city limits or ETJ

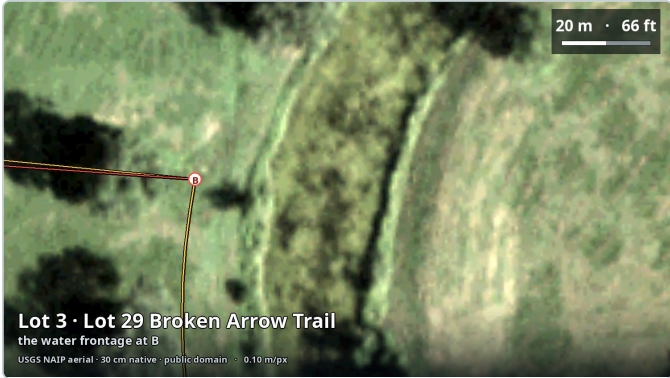


- Open in Google Maps
- Google Street View
- Zillow — search this address
- BCAD record — PID 186219

THE PARCEL FROM ABOVE — LISTING AERIALS

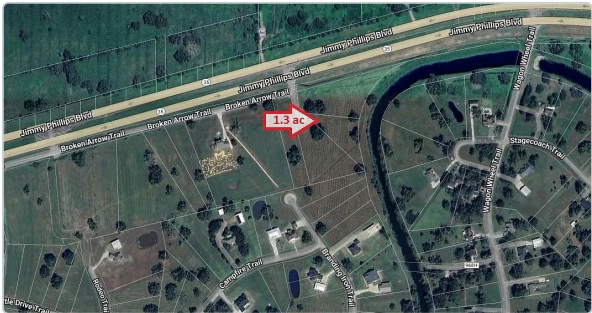

BOUNDARY MARKED Position in the subdivision, with the **1.3 ac** call-out. The lot sits inside the bend of the watercourse off the **Broken Arrow Trail** cul-de-sac, **SH 35 / Jimmy Phillips Blvd** along the top.

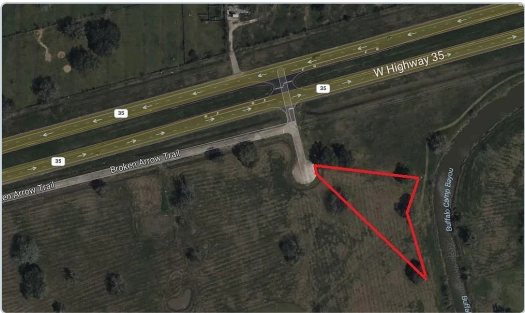

BOUNDARY MARKED The boundary as marketed — a **triangle**, its two long sides converging to a point at the cul-de-sac. The channel on the right is labelled **Buffalo Camp Bayou**; see §31 on that name.

Supplied for the listing, and they replace the “no photography” note earlier editions carried for this lot. Imagery © 2025 Airbus / Maxar Technologies via Google Maps; the outline and the acreage call-out are the vendor’s. The **1.3 ac** agrees with the 1.30 acres of record, which is what corrected the original portfolio’s “~1.0 ac est.” The drawn triangle also agrees with the recorded BCAD polygon plotted independently by [tools/lotmap.py](#) — so on this lot, unusually, the marketing graphic and the

record are consistent. What the imagery adds beyond the plan drawings is **ground cover**: the ploughed centre, the tree line along the water, the farm track across the south-west. And it makes visible the measurement in the note below.

THE FRONTAGE IS A POINT, NOT A FRONTAGE

Measured off the recorded polygon, the boundary that lies against the Broken Arrow Trail cul-de-sac bulb is **about 10 ft long**. The two long sides — 504 ft along the water and 337 ft on the south-west — converge to very nearly a single point at the road. Everything the lot needs has to pass through that gap: the driveway, the water line, the electric service and the septic pump-out access. It also gives a plausible reason why the situs of record is the bare street name “**HIGHWAY 35**” with no house number, which is the 911-address blocker in §25. **Treat the 10 ft as indicative, not surveyed** — a digitised apex is exactly where GIS polygons are least reliable, and the plat may show a wider platted frontage. But the qualitative finding stands and is visible in the image: **this lot touches its street at a corner**. Put the frontage dimension at the top of the survey instruction in §34, and ask the county whether it meets the minimum frontage for a building permit before you offer.

BEST FOR

Value, on every measure that can be checked. It is the only lot priced below the county's own appraisal, the cheapest per acre by 11%, the second largest, and it is waterfront after all.

WATCH

The street frontage is about 10 ft. The recorded polygon is a triangle whose two long sides converge to very nearly a point at the Broken Arrow Trail cul-de-sac, so the driveway and every utility have to pass through that one gap — see the aerials and the note below. Section 16 is also governed by a different recorded restriction instrument (84-29/885, 1984) from Sections 1 and 2, so the ACC rules are not necessarily the ones quoted for the other lots. And no street number has been assigned, so confirm the listing actually refers to PID 186219.

VERDICT ON THIS LOT

On price and land quality this is still the pick of the five — the only lot below county appraisal, the cheapest per acre, waterfront, and the second largest. But it is now the lot with the most to confirm rather than the safest buy. Two things have to come back clean before an offer: the **frontage dimension**, because a 10 ft access point can constrain or even prevent a permit, and the **911 address**, which the county will not issue a building permit without. Both are answerable in a fortnight and neither costs much. Resolve them and it leads the portfolio; leave them open and it is the riskiest of the five, because the risk is on the ability to build at all rather than on the cost of building.

750 Wagon Wheel Trail

Angleton, TX 77515 • Bar-X Ranch #1 • Lot 132


ZONE AE WATERFRONT — FLAG LAKE ABUTS A DAM DEAREST / ACRE

\$58,000

\$58,000 per acre • 1.00 ac of record
+16.0% vs county appraisal



LEGAL	Lot 132 • 1.00 ac of record	SOIL	Pledger clay — vertisol, hydrologic group D
SITUS OF RECORD	750 WAGON WHEEL TRAIL	WATER	Flag Pond, 101.5 ac — named in USGS hydrography 14 ft off, plus the levee.
DEED • PLAT • RESTRICTIONS	V1729P804 • 16/104 • 1515/679	WATER REGIME	Impounded, so it holds. Flag Pond is retained by the Flag Lake Levee and keeps water year-round. Note what is 167 ft away, though: a canal/ditch (NHD FCode 33600), artificial drainage that is normally dry between rain events.
DIMENSIONS	bbox 479 × 123 ft • county polygon 0.955 ac	STOCKED?	Not by the state. Flag Pond is not in TPWD's stocking list. Any stocking is the POA's, on POA terms.
FLOOD	Zone AE • panel 48039C0420K, 30 Dec 2020	HIGHWAY JURISDICTION	1.03 mi south of State Highway 35 Unincorporated • no city limits or ETJ
NEAREST BFE LINE	28.0 ft NAVD88 , 1,492 ft off the parcel		
GROUND (LIDAR)	24 ft at the parcel (a 24 ft contour passes within 1 ft of the centroid)		

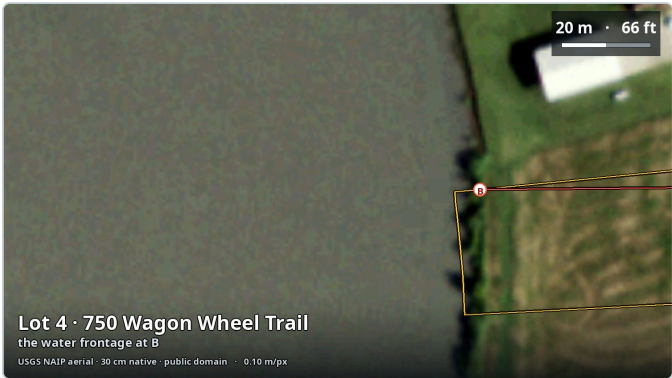

Open in Google Maps Google Street View Zillow — search this address BCAD record — PID 183332 Realtor.com listing

AERIAL PHOTOGRAPHY — SUPPLIED BY THE SELLER



BOUNDARY MARKED The parcel outlined by the seller, short end to the water. The **long narrow shape** matches the recorded 479 × 123 ft footprint.



BOUNDARY MARKED The same outline from the north, with built houses on both flanks and the impounded water across the foreground.

These are the **first boundary-marked photographs of Lot 4** in any edition. One caution, and it is not a small one: **Lot 4 and Lot 5 are 95 ft apart** and their footprints are 479 × 123 ft and 490 × 110 ft — near-identical long rectangles on the same street. Nothing in the imagery itself separates them. These two frames are attributed to Lot 4 because the outline was drawn for the **750 Wagon Wheel Trail** listing and appears under no other; that is the seller's attribution, not an independent one. Confirm the boundary against the survey before you rely on it.

BEST FOR

The view and the water. If the point of the exercise is a lake house, this is the only lot that delivers a 101-acre lake rather than a 13-acre pond.

WATCH

Two things. It is 1.00 acre of record — **not** the 1.27 acres quoted from LoopNet — which makes it the most expensive land per acre in the portfolio by 28% over Lot 3. And the boundary is 11 ft from a levee embankment that impounds a 101-acre lake; the National Inventory of Dams carries no hazard-potential classification and no condition rating for it.

VERDICT ON THIS LOT

Best lot to live on, worst lot to buy on price. The dam needs answering first.

LOT 5 OF 5 • PID 183331 • 1533-0131-000

808 Wagon Wheel Trail

Angleton, TX 77515 • Bar-X Ranch #1 • Lot 131

ZONE AE WATERFRONT — FLAG LAKE PAD DOES NOT FIT ABUTS A DAM DEAREST / ACRE — BY 61%

\$100,000

\$93,458 per acre • 1.07 ac of record
+87.7% vs county appraisal



LEGAL	Lot 131 • 1.07 ac of record	SOIL	Pledger clay — vertisol, hydrologic group D
SITUS OF RECORD	808 WAGON WHEEL TRAIL	WATER	Flag Pond again, 19 ft off — Lot 4's immediate neighbour on the same shoreline.
DEED • PLAT • RESTRICTIONS	2007-000505 • 16/104 • 1515/679	WATER REGIME	Impounded, so it holds. Flag Pond again, same levee, same year-round pool. The feature 94 ft off the boundary is the same canal/ditch as Lot 4 — drainage infrastructure, dry between rain events, not an amenity.
DIMENSIONS	bbox 490 × 110 ft • county polygon 0.964 ac	STOCKED?	Not by the state. As Lot 4 — Flag Pond carries no TPWD stocking record.
FLOOD	Zone AE • panel 48039C0420K, 30 Dec 2020	HIGHWAY	1.03 mi south of State Highway 35 — effectively identical to Lot 4
NEAREST BFE LINE	28.0 ft NAVD88 , 1,336 ft off the parcel	JURISDICTION	Unincorporated • no city limits or ETJ
GROUND (LIDAR)	24–25 ft at the parcel (mean 24.6 ft)		



Open in Google Maps Google Street View Zillow — search this address BCAD record — PID 183331

AERIAL PHOTOGRAPHY — SUPPLIED BY THE SELLER



The parcel as marketed, labelled by the seller. Cleared, with Flag Lake beyond and built houses either side.



Flag Lake from the south. The impounded pool sits above the surrounding pasture.



The lake shore and the levee embankment that retains it.

Three things here matter to the numbers. **The parcel is already cleared and mown**, so the clearing allowance in §21 sits at the bottom of its range. **Utility poles run the length of Wagon Wheel Trail at the frontage**, which makes the \$0–\$25,000 electric-extension range in §21 a low-end number on this lot rather than an open question. And **both neighbouring parcels are built** — one house is new, on a visibly raised pad — which is the practical answer to the pad-geometry question below.

MORE SELLER PHOTOGRAPHY — THE PARCEL AS LABELLED



BOUNDARY MARKED The parcel outlined at the frontage. Utility poles run the length of Wagon Wheel Trail here, and the ground is mown.



BOUNDARY MARKED The seller's own "808 Wagon Wheel Trail" label and leader line, with Flag Lake behind and the new-built house alongside.

The printed address label is the strongest attribution available anywhere in this photo set — it is the seller naming the parcel in the frame. Note that the outline in the left frame and the labelled parcel in the right frame are consistent with one another, which is what lets both be read as Lot 131.

BEST FOR

Frontage on the same 101-acre lake as Lot 4, with 0.07 more acre of record, and the quietest position in the study alongside its neighbour. That is the whole of the case for it, and at the asking price it is not enough — see the verdict.

WATCH

\$100,000 is \$93,458 an acre (MLS 84275418) — **2.5× Lot 3**, 61% above its own neighbour Lot 4, and **+87.7% over the county's appraisal of \$53,280**, the largest premium of the five by a factor of three. **And the building pad does not fit.** At 490 ft × 110 ft this is the narrowest parcel in the study, and the pad geometry needs 116 ft of width against the 110 ft available — it fails by 6 ft, the only lot of the five to fail outright. It also needs the deepest lift of any lot at 4.69 ft, sits on **Pledger clay** at 69.5% clay, is 21 ft from a levee impounding a 101-acre lake with no published hazard class, and its acreage of record (1.07) exceeds the county's own polygon (0.964) by 11%.

VERDICT ON THIS LOT

Rule this one out. It is the dearest land per acre in the study by 61%, carries the largest premium over appraised value by a factor of three, needs the deepest lift, sits on the worst soil, abuts an unrated levee — and is the only parcel where the pad does not fit at all. Its lake frontage is available next door on Lot 4 for \$42,000 less. There is no version of this brief in which Lot 5 is the right purchase at \$100,000; on cost-to-build-ready it is **\$108,000 worse than Lot 2**.

11 · Flood — the finding that changes the build

All five lots are in a mapped Special Flood Hazard Area. That was never in doubt. What both earlier editions got wrong is the elevation arithmetic, and it goes the wrong way.

THE CORRECTION

Both earlier editions assumed a base flood elevation of **24 ft** and concluded that natural ground of 28–30 ft cleared the county's requirement comfortably, so the house could be built at grade with no fill. Queried against the county's own copy of the effective FIRM:

- The **nearest published BFE line to every one of the five lots reads 28 ft NAVD88**, with a 29 ft line further upstream. Not 24 ft.
- The Zone AE polygon carries **no static BFE** — meaning the BFE varies across it and must be read from the flood profile, which is precisely why a single assumed figure was never safe.
- County **LiDAR elevation contours** put natural ground at the parcels at **24–28 ft**, not 28–30 ft.

Per-lot elevation arithmetic at the **optimum pad location** on each lot, from a 5 m DEM grid inside each boundary. Requirement = 28 ft BFE + 24 in freeboard = 30 ft. Costed in \$22. **NEW IN V3**

LOT	NEAREST PUBLISHED BFE	GROUND AT PARCEL (LIDAR)	REQUIRED FINISHED FLOOR	FILL / STEM WALL NEEDED	CONSEQUENCE
1127 Saddle Horn Bend	28 ft	25.3 ft	30 ft	4.2 ft	1,416 cy of fill. Room to build the pad and its slopes easily.
336 Wagon Wheel Trl W	28 ft	28.8 ft	30 ft	0.7 ft	268 cy. Practically at grade — the standout of the five.
Lot 29 Broken Arrow Trl	28 ft	26.5 ft	30 ft	3.0 ft	963 cy. Straightforward.
750 Wagon Wheel Trl	28 ft	24.3–25.7 ft	30 ft	3.8–5.2 ft	1,255–1,808 cy, and the pad barely fits the width. See \$22.

WHAT THIS DOES TO THE COST MODEL

The second edition carried engineered pad and fill at **\$0–\$8,000**, treating it as optional. On these figures it is not optional on any lot, and a 4–6 ft lift under a 2,400–2,800 sq ft house is a different item altogether.

\$22 prices this per lot: \$12,400 to \$77,800. It is the third largest line in the whole project after the house and the land.

It also all but forecloses the LOMA. A Letter of Map Amendment requires naturally high ground; placing fill converts the application into a LOMR-F, which carries a FEMA review fee and a far heavier evidential burden.

750 WAGON WHEEL TRAIL SITS AGAINST A DAM

The parcel boundary runs **11 ft** from the **Flag Lake Levee** embankment, which impounds the 101.5-acre Flag Pond. The structure is in the National Inventory of Dams as **TX06298**. Published NID data carries **no hazard-potential classification and no condition assessment** for it.

Lot 1 has a lighter version of the same question: it lies downstream of **Bar X Development Dam (NID TX01759)** on a Mill Bayou tributary, which NID does rate — low hazard potential. Ask TCEQ Dam Safety about both before buying either.

WHAT STILL HAS TO BE CONFIRMED IN WRITING, PER LOT

- **The site-specific BFE** from Brazoria County Floodplain & 911 Administration. A published BFE line 1,000–2,500 ft away is strong evidence, not a determination. Ask which cross-section governs each lot — Mill Bayou governs Lot 1, and it is a different watercourse from the one governing Lots 2 and 3.
- **Lowest adjacent grade at the proposed footprint**, from a topographic survey. The LiDAR contour band is a screening tool; the elevation certificate will be written from a survey.
- **Pluvial ponding**. Flat coastal clay floods from rainfall alone, and a riverine BFE says nothing about it. The wettest year in the 1991–2020 record delivered **2,024 mm** of rain against a 1,177 mm average — four times the driest year.
- **Levee status**. Whether the Angleton Levee is FEMA-accredited, and its trajectory, remains unconfirmed — as does the condition of Flag Lake Levee.

One correction carried forward: the county's 24-inch freeboard was adopted by Commissioners Court in **May 2005**, not raised after Hurricane Harvey in 2017. The original portfolio's causal story was twelve years out.

MILL BAYOU FROM THE AIR — SELLER PHOTOGRAPHY



Left: Mill Bayou's course through the subdivision, with **State Highway 35** across the foreground and one of the association's lakes at the top left. Right: the meander at Saddlehorn Bend that Lot 1 sits inside. Two things these confirm that the mapping alone could not. **The channel is at low water with exposed banks** — consistent with the intermittent classification in §31. And **the highway really is that close** to the northern lots: the 480 ft measured to Lot 1 is a distance you can see.

12 · Terrain, slope and how the drawings were made

The next five pages give each lot a true-scale plan with the county's 1-foot LiDAR contours, and a longitudinal section cut along the dotted A-B line from the roadside boundary to the lakeside boundary.

HOW TO READ THEM

- **The plan is rotated** so that A-B runs left to right. North is shown by the needle, which therefore points somewhere other than up.
- **Plan and section share the same horizontal scale** and the same left-right position, so you can drop a finger down from any point on the plan to the same point on the section.
- **A** is the boundary at the street, **B** the boundary at the water. The profile is continued a short way past both so the road ditch and the water are visible.
- **The section is drawn three times.** Once vertically exaggerated so the shape can be seen, with the **true** slope angles printed on the notable breaks; once at a true **1:1**, which is what the ground really looks like; and once as an earth-curvature check.

WHERE THE ELEVATIONS COME FROM

Contours are Brazoria County's published LiDAR product at a **1-foot interval**. The profile is sampled from the **USGS 3DEP 1-metre digital elevation model** at roughly 1 m spacing along the line, converted from metres to feet. The two are independent datasets and they agree to within about a foot across all five lots, which is the main reason to trust either.

HONEST LIMITATION

A DEM is a model of a bare-earth surface, not a survey. Slope angles quoted over a 6–8 m baseline are reliable to a fraction of a degree; spot elevations are good to roughly ± 0.5 ft. An elevation certificate will be written from an instrument survey, not from this.

WHY THE AERIALS ARE NOT SHARPER — AND WHY THEY HAVE NOT BEEN UPSCALED

The lot aerials come from **USGS NAIP at 30 cm native**, the best free public orthoimagery for this area. Esri World Imagery was tested as an alternative and reaches **0.261 m per pixel** here — a 15% gain, not a transformation; above zoom 19 its tiles return only 123 distinct colours, which is upsampling rather than new detail. So **2,400 m² of Texas coastal prairie simply does not exist at higher resolution in any free source.**

Rather than stretch a 1,400 px frame across the full column at ~198 dpi, or upscale it and invent sharpness the imagery does not contain, each aerial is **presented at the width its own pixels support at 300 dpi**. That is why the frames on the narrower parcels are smaller on the page: they are sharp at the size shown. The seller's oblique photography in §6 and §10 is 1,280 px and is reproduced three-up, where it prints at about 555 dpi.

THE FIVE LOTS COMPARED ON TERRAIN

Plateau figures are the range across the level central part of each transect — the part you would actually build on. **NEW IN V3**

LOT	SECTION A-B	GROUND ON THE BUILDABLE PLATEAU	HIGHEST	LOWEST	RELIEF	STEEPEST BANK	FILL AT THE BEST PAD (\$22)
1127 Saddle Horn Bend	562 ft	24–26 ft	26.0 ft	21.2 ft	4.8 ft	8.4° (15%)	4.2 ft
336 Wagon Wheel Trl W	412 ft	27–29 ft	29.1 ft	21.2 ft	8.0 ft	8.8° (16%)	0.7 ft
Lot 29 Broken Arrow Trl	453 ft	26–27 ft	26.9 ft	21.2 ft	5.7 ft	11.6° (20%)	3.0 ft
750 Wagon Wheel Trl	568 ft	23–24 ft	30.7 ft (levee crest)	23.1 ft	7.6 ft	8.5° (15%)	3.8–5.2 ft

THE HEADLINE: THIS IS FLAT LAND WITH A BANK AT THE END




Across all five lots the buildable ground falls within about **1.5 ft over 300–400 ft** — a true gradient of roughly **0.2°**, which is why the 1:1 panels look like straight lines. That is *good* news for a garden and for a house pad, and *bad* news for drainage: water does not run off flat clay, it sits on it. Every angle worth reporting is concentrated in the last few metres before the water, where the bank drops 3–4 ft at 8–12°, and in the roadside ditch.

ON EARTH CURVATURE, SINCE YOU ASKED

Each section carries a curvature panel. Over transects of 412–568 ft the sea-level surface departs from the flat drawing datum by **1.5 to 2.4 mm** — that is 0.005 to 0.008 *feet*, roughly one hundredth of the DEM's own vertical uncertainty and about one two-hundredth of a single contour interval. It is drawn, exaggerated by a factor of tens of thousands, purely so you can see that it has been checked. It is correctly ignored everywhere else in this document.

13 · Terrain — Lot 1, 1127 Saddle Horn Bend

Plan and section at a true horizontal scale of 1:2000. Contours are the county's 1 ft LiDAR product; the profile is USGS 3DEP 1 m DEM. Section A-B runs from the Saddle Horn Bend frontage (A) to the water boundary (B), a distance of 444 ft across the parcel.

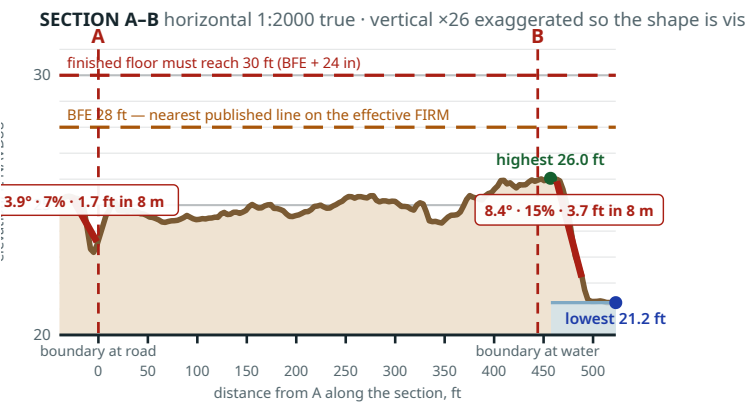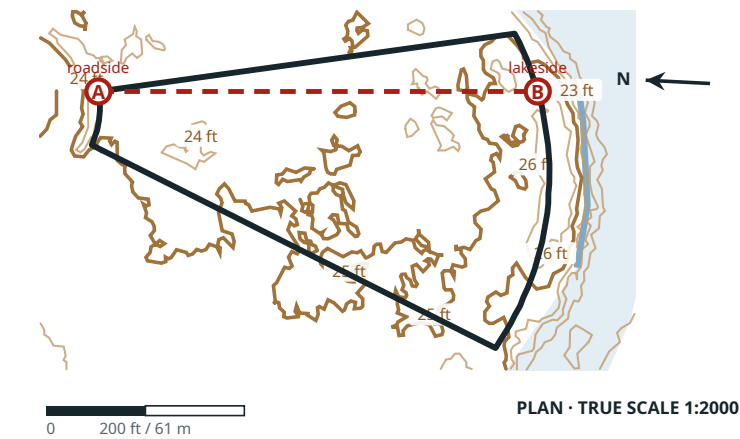

WHAT THE GROUND DOES




The section runs 562 ft from the Saddle Horn Bend frontage out to the Mill Bayou edge. The lot is a wedge: narrow at the road, wide at the water. Ground sits at 24–26 ft across the buildable middle, then drops 3.7 ft in the last 8 m to the bayou at 21.2 ft — an 8.4° bank. There is a second, sharper dip right at the road: 1.7 ft in 8 m at 3.9°, which is the roadside drainage ditch, not landform. Everything between is within a foot and a half of level.

WHAT IT MEANS FOR BUILDING

The pad problem is visible here. The highest natural point anywhere on the transect is 26.0 ft, and the finished floor has to reach 30 ft. That is a 4 ft lift at the very best spot, and 5–6 ft anywhere you would actually want to sit the house.

14 · Terrain — Lot 2, 336 Wagon Wheel Trail W

Plan and section at a true horizontal scale of 1:1250. Contours are the county's 1 ft LiDAR product; the profile is USGS 3DEP 1 m DEM. Section A-B runs from the Wagon Wheel Trl frontage (A) to the water boundary (B), a distance of 412 ft across the parcel.

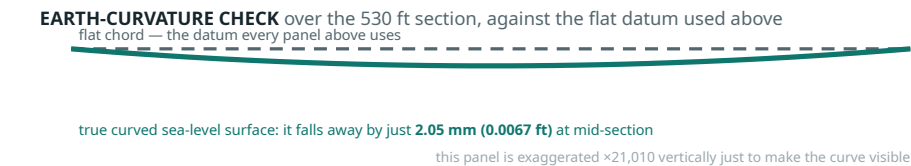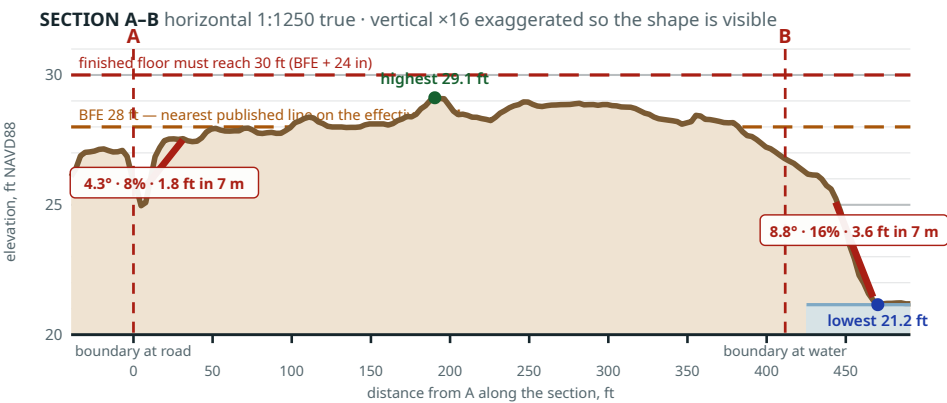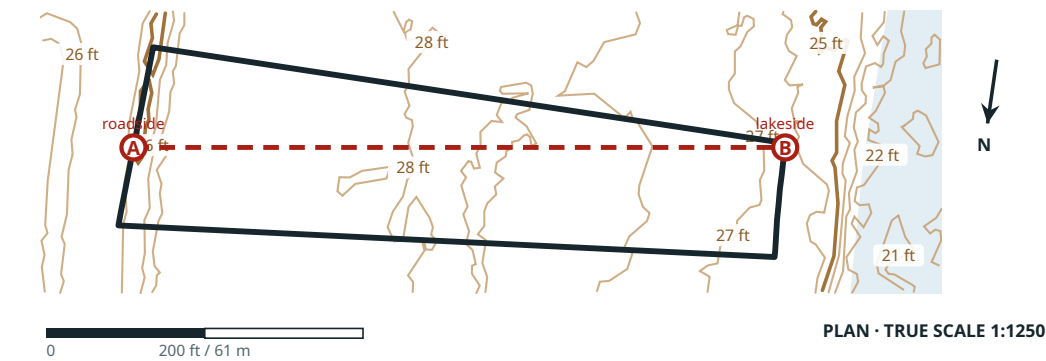

WHAT THE GROUND DOES




The section runs 412 ft from Wagon Wheel Trail to the pond. This is the driest profile of the five: the ground rises off the road to **29.1 ft** — the highest natural elevation measured on any of the five lots — holds a broad, genuinely level plateau across the middle of the lot, then falls away at **8.8°** over the last few metres to the water at 21.2 ft.

WHAT IT MEANS FOR BUILDING

At 29.1 ft the plateau is **within a foot of the 30 ft requirement**. That is the single most valuable physical fact in this portfolio: a foot of fill instead of five or six, on a lot that also happens to be the cheapest.

15 • Terrain — Lot 3, Lot 29 Broken Arrow Trail

Plan and section at a true horizontal scale of 1:2000. Contours are the county's 1 ft LiDAR product; the profile is USGS 3DEP 1 m DEM. Section A-B runs from the Broken Arrow Trl frontage (A) to the water boundary (B), a distance of 335 ft across the parcel.

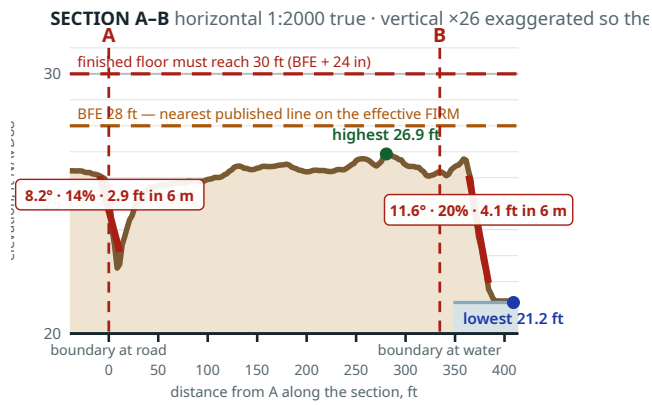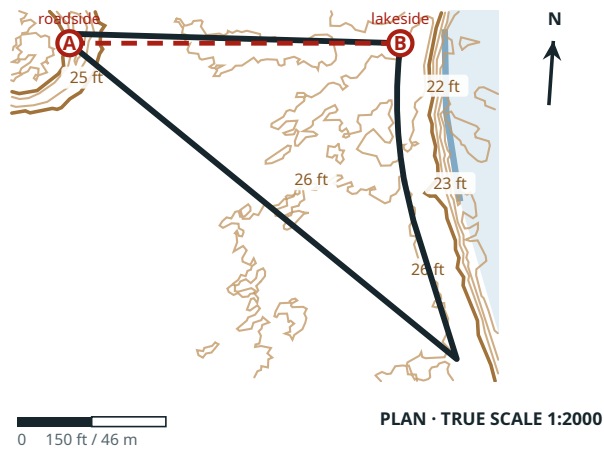

WHAT THE GROUND DOES



The section runs 453 ft from Broken Arrow Trail to the pond. The plateau is real and broad at 26–27 ft, with the high point at 26.9 ft. The lakeside bank is the **steepest bank of the five at 11.6°** — 4.1 ft of drop in 6 m — and there is another 8.2° cut at the road, again the ditch.

WHAT IT MEANS FOR BUILDING

Good, level building ground at 26–27 ft, needing about 3–4 ft of fill. The steep bank at B matters for the TCEQ 75 ft absorption setback and for erosion, and the ground it is cut into is Pledger clay.

16 • Terrain — Lot 4, 750 Wagon Wheel Trail

Plan and section at a true horizontal scale of 1:1250. Contours are the county's 1 ft LiDAR product; the profile is USGS 3DEP 1 m DEM. Section A-B runs from the Wagon Wheel Trl frontage (A) to the water boundary (B), a distance of 450 ft across the parcel.

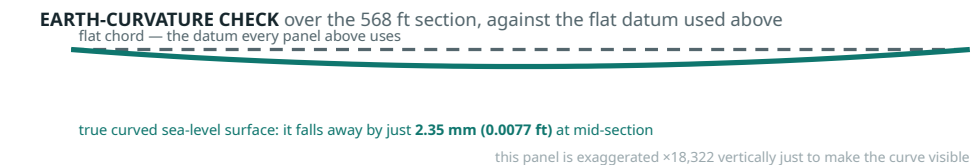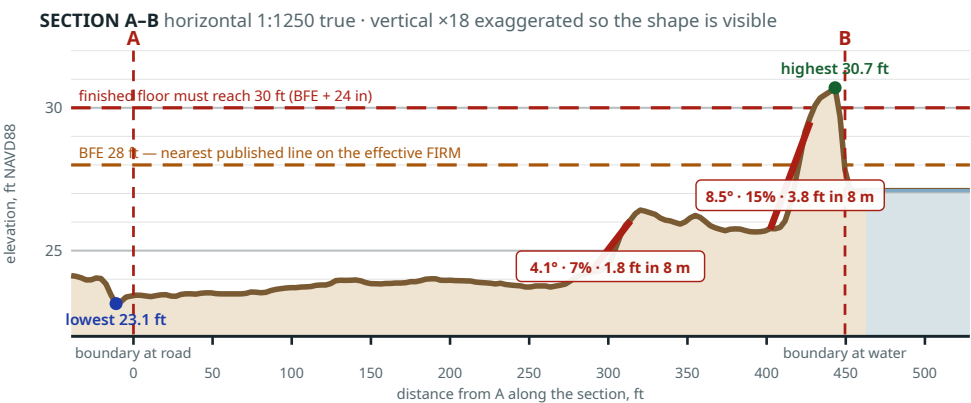

WHAT THE GROUND DOES




The section runs 568 ft from Wagon Wheel Trail to Flag Pond, and it is the one profile that behaves backwards: the ground **rises** toward the water, from 23.1 ft near the road to **30.7 ft** at the far boundary, on a sustained **8.5°** climb.

WHAT IT MEANS FOR BUILDING

That rise is not a hill. It is the **Flag Lake Levee embankment**. The 101-acre pond is impounded *above* the level of the buildable part of the lot — the interior sits at 23–24 ft, the lowest of the five, while the crest beside it reaches 30.7 ft. You would be building in the shadow of a structure the National Inventory of Dams carries with no hazard classification and no condition rating.

17 • Terrain — Lot 5, 808 Wagon Wheel Trail

Plan and section at a true horizontal scale of 1:1500. Contours are the county's 1 ft LiDAR product; the profile is USGS 3DEP 1 m DEM. Section A-B runs from the Wagon Wheel Trl frontage (A) to the water boundary (B), a distance of 478 ft across the parcel.

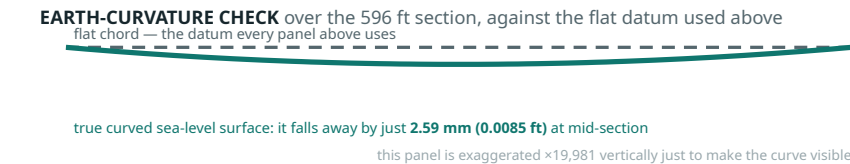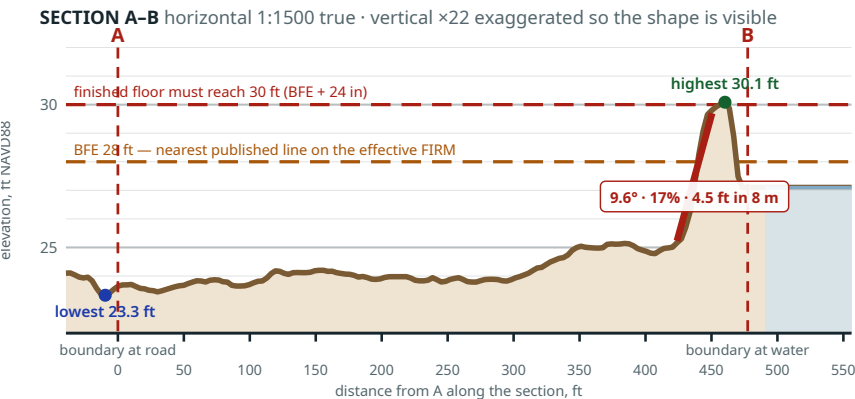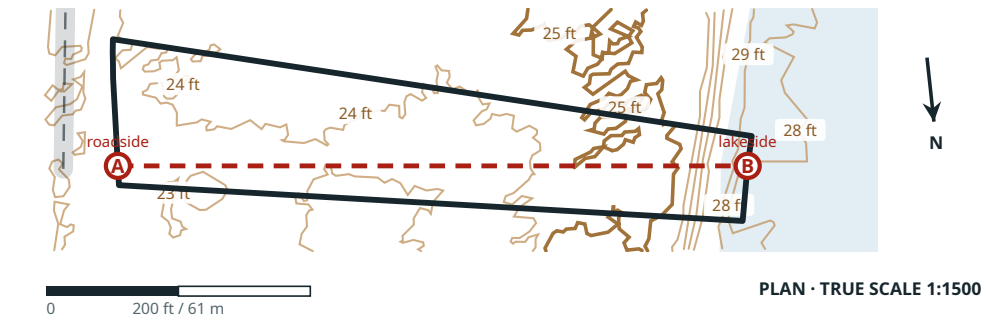

WHAT THE GROUND DOES

The section runs 477 ft from Wagon Wheel Trail to Flag Pond, and it is Lot 4's profile repeated 85 ft along the same shoreline. Ground leaves the road at **24.1 ft**, holds 24–25 ft across the buildable middle, and then **climbs** to the far boundary. The steepest run measured anywhere in this study is here: **4.46 ft in 8.1 m, a 9.6° grade** at 16.9%. Total relief 6.8 ft, from 23.3 ft to 30.1 ft.

WHAT IT MEANS FOR BUILDING

As on Lot 4, the high ground is the **Flag Lake Levee**, not landform — the pond is impounded above the buildable part of the parcel. The buildable interior is the problem: the best pad ground is **24.8 ft**, so reaching a 30 ft floor is a **4.7 ft lift**, the deepest of the five, at 1,603 cu yd. And the parcel is only **110 ft wide** where the pad and its side slopes need 116 ft. On this geometry the pad does not fit.

18 · Soil — the one thing that decides all three of your problems

Soil settles your garden, your septic system and your foundation at the same time, and the five lots do not share it. The USDA soil survey splits them cleanly down the middle.

USDA NRCS SSURGO, Brazoria County soil survey, major component of the map unit at each parcel centroid. NEW IN V3

PROPERTY	LOTS 1 & 2 — ASA SILTY CLAY LOAM	LOTS 3, 4 & 5 — PLEDGER CLAY	WHY IT MATTERS TO YOU
Taxonomy	Fluventic Hapludoll — an alluvial mollisol	Typic Hapludert — a vertisol	Mollisols are the world's good farming soils. Vertisols are fertile but physically hostile.
Clay content, topsoil	36.5%	69.5%	Workability, drainage, everything.
Organic matter, topsoil	3.1%	6.5%	Both genuinely fertile; Pledger more so.
pH (1:1 water)	6.8 — near neutral	7.0 — neutral	Both excellent. Neither needs correcting for most vegetables.
Drainage class	Well drained	Moderately well drained	Wet feet kill more garden plants here than cold does.
Surface runoff	Negligible	High	High runoff on flat ground means standing water after rain.
Hydrologic group	B	D	D is the worst class — least infiltration, most runoff. A pluvial flood risk the FEMA map does not describe.
Saturated conductivity	9.0 µm/s	0.21 µm/s	Pledger is 43× less permeable . This is what drives the septic system type.
Linear extensibility (shrink-swell)	4.5 — low to moderate	19 — very high	Above about 9 is “high”. This is the number that cracks slabs, drives, and pipework.
Available water capacity	0.18–0.20	0.14	Asa holds more plant-available water despite being lighter.
Farmland classification	All areas prime farmland	All areas prime farmland	Both are officially prime. “Prime” is about fertility, not about being easy.
Flooding frequency	Rarely flooded	Rarely flooded	Same on both.

ASA SILTY CLAY LOAM — LOTS 1 AND 2

For gardening: this is the good stuff. A silty clay loam at pH 6.8 with 3% organic matter, well drained, negligible runoff. It works over a wide moisture range, takes a spade in most weather, holds water without waterlogging, and needs no pH correction. You could plant directly into it.

For septic: at 9 µm/s it is likely TCEQ **Class III**, which means roughly 2,250 sq ft of absorptive area and a realistic chance of avoiding a full aerobic spray system. **For foundations:** a linear extensibility of 4.5 is ordinary engineering.

PLEDGER CLAY — LOTS 3 AND 4

For gardening: hard work, permanently. Nearly 70% clay with slickensides in the subsoil. It is sticky and unworkable when wet, sets like fired brick when dry, and opens cracks you can put a hand into in August. Very fertile — but most people here end up gardening in **raised beds with imported soil**, which is a real annual cost and effort.

For septic: 0.21 µm/s is effectively impermeable — TCEQ **Class IV**, a conventional drainfield is not allowed, and an **aerobic unit with a spray or drip field is mandatory**: \$15,000–\$25,000 plus a maintenance contract for life. **For foundations:** extensibility 19 demands a post-tensioned or pier-and-beam design plus lifelong moisture management around the perimeter.

WHAT THIS IS WORTH, IN MONEY

On the septic alone the soil difference is plausibly **\$7,000–\$15,000** in favour of Lots 1 and 2, plus \$300–\$600 a year forever for the aerobic maintenance contract that Lots 3 and 4 will require. On the foundation, a post-tensioned slab engineered for a high-PI vertisol typically runs **\$8,000–\$20,000** above a conventional engineered slab on a 2,400–2,800 sq ft house. Lot 29's \$10,000 land saving does not survive either comparison, let alone both.

THE LIMIT OF THIS FINDING — AND IT IS A REAL LIMIT

SSURGO is mapped at about 1:24,000. It tells you the soil that *predominates* in a map unit, and the major component here is given an 85% share. It is strong evidence and it is free; it is **not** a site-specific soil evaluation, and the TCEQ soil class that actually governs your permit can only be set by a licensed site evaluator digging on your lot. Order that evaluation on the shortlisted lot before you close. It costs \$350–\$600 and it is the highest-value money in this entire project.

19 • Deed restrictions and buildability

The recorded Bar X Ranch declaration of restrictions has now been read rather than paraphrased. Several figures repeated by the earlier editions are not in it, and several provisions that matter a great deal to your plans are.

Bar X Ranch declaration of restrictions as recorded (Deed Vol. 1679, Pg. 695). **NEW IN V3**

PROVISION	WHAT THE RECORDED INSTRUMENT ACTUALLY SAYS	EFFECT ON YOUR PLAN
§3.15 Pets and livestock	No livestock of any kind other than house pets of reasonable kind and number. Horses are the single express exception: 1 per 32,670 sq ft, 2 per 42,000 sq ft, one more per additional 21,880 sq ft.	Chickens and ducks are not house pets and are not horses. Your hobby-farming plan is very likely barred.
§3.01 Structures permitted	One single-family dwelling, one attached or detached garage, and one horse barn no larger than 30 ft × 25 ft. Anything else needs written committee approval before construction.	No coop, no run, no shed, no greenhouse without a written variance. A greenhouse is as much of an issue as a coop.
§3.03 Dwelling size	Minimum 1,100 sq ft of living area, excluding open porches and garages; 1,400 sq ft if more than two storeys.	The “ 1,800 sq ft minimum ” quoted by earlier editions is not in this instrument. Your 2,400–2,800 sq ft house clears it easily either way.
§3.06 Minimum lot area	No building on a lot under 21,880 sq ft; no resubdivision without written committee approval.	All five lots clear this. Lot 2 at 0.872 ac by the county polygon is still 38,000 sq ft.
§3.05 Orientation	The front of the lot is the property line with the shortest dimension abutting a street; the dwelling must face it; a detached garage may sit no nearer the front line than the house.	Fixes your house orientation. On the long, narrow lots this constrains where the septic field and garden can go.
§3.12 Fences	Any lot with a horse barn must be fenced. All fences and their locations need written approval. No home-made fences.	A garden fence — against deer, rabbits and your own dogs — is a committee submission.
§3.04 Roofing	Wood shingle, built-up tar and gravel, or asphalt shingle of not less than 340 lb per square.	Rules out standing-seam metal without a variance; metal is otherwise the sensible coastal choice.
§3.07 Nuisance	No noxious or offensive activity, nor anything that may become an annoyance to the neighbourhood. Exterior display or discharge of firearms expressly forbidden.	A cockerel is the textbook “annoyance” complaint even where hens are tolerated.
§3.13 Lot maintenance	Owners must keep grass and weeds cut and fences painted; the association may enter, do the work, and bill the owner.	This is the origin of the \$125 vacant-lot mowing charge in the carrying-cost model.
§3.14 / §3.16 Septic and drainage	No septic tank may drain into road ditches. Drainage of streets, lots or roadway ditches may not be impaired.	Directly relevant to the 2–6 ft pad that §11 shows you need: you may not solve your flood problem by pushing water onto the road or a neighbour.
§4.05 Committee	The architectural control committee's powers ceased 15 years after the instrument and passed to the property owners' association.	Submissions go to the POA today, not to a developer committee.

THE CAVEAT THAT YOU MUST CLOSE BEFORE RELYING ON ANY OF THIS

The instrument read above is **one** Bar X Ranch declaration. Your five lots are governed by **three different recorded instruments** — Section 1 by 1515/679 (1980), Section 2 by 1532/471 (1980), Section 16 by 84-29/885 (1984) — and none of them is the document quoted here. Subdivision declarations of this era were near-identical in form across sections, so the provisions above are very likely to be substantially what governs your lot. **Very likely is not good enough for the decision you are making.** Pull the recorded instrument for the specific lot from the Brazoria County Clerk, and ask the POA in writing, before you close, one question: *may I keep a small number of chickens and ducks, and may I build a coop and a greenhouse?* Get the answer on letterhead.

IF POULTRY IS THE POINT, HERE IS THE ALTERNATIVE

Unincorporated Brazoria County has **no zoning**, so outside a deed-restricted subdivision there is generally nothing stopping you keeping poultry on your own land. The trade is everything Bar X Ranch gives you — the two lakes, two pools, clubhouses, tennis and basketball courts, playgrounds, concrete streets, the 97% owner-occupied neighbourhood and the maintained frontages. Unrestricted acreage a few miles further out will let you keep ducks and will not give you any of that. That is the real choice in front of you, and it is not a choice this document can make for you.

20 · Septic (OSSF) — sized against the regulation, per soil

Every house here is on a private well and an on-site sewage facility. This is where the original portfolio was most wrong, and where §18's soil finding now produces two different answers.

30 TAC §295.91 Table III and §295.91(2)

BASIS	FLOW Q (GPD)	SEPTIC TANK REQUIRED
5 bedrooms, dwelling under 4,500 sq ft, no water-saving devices	450	Both flows fall in the 351–500 gpd band → 1,250 gal minimum VERIFIED
Same, with water-saving devices	360	

Absorptive area = $Q \div R_a$. The original portfolio used 0.6 gal/sf/day, which exceeds every class in the TCEQ table. **VERIFIED**

TCEQ SOIL CLASS	LOADING RATE R_a	ABSORPTIVE AREA AT $Q = 450$	WHICH LOTS	SYSTEM THAT RESULTS
Class III — clay loam	0.20 gal/sf/day	~2,250 sq ft	Lots 1 & 2 — Asa, 9 μ m/s	Conventional drainfield may be permissible; low-pressure dosed or aerobic if not. \$8,000–\$15,000
Class IV — clay	0.10 gal/sf/day	~4,500 sq ft	Lots 3, 4 & 5 — Pledger, 0.21 μ m/s	Conventional drainfield not permitted . Aerobic treatment unit (600 gal min) plus spray or drip field, and a mandatory maintenance contract. \$15,000–\$25,000
Class Ib–II — sandy/loamy	0.25–0.38	~1,184–1,800 sq ft	Neither, on the survey	Conventional. Cheapest outcome, not available here.

THE NUMBER THE ORIGINAL DOCUMENT SIMPLY DID NOT CONTAIN

Whichever class applies, TCEQ requires a **100% reserve area** in addition to the field. On Lots 3 and 4 that means committing roughly **9,000 sq ft — a fifth of a one-acre lot** — to sewage disposal, before the house, the driveway, the garage, the well and your garden. On Lots 1 and 2 the same commitment is about 4,500 sq ft. The original budgeted the permit and the soil test and left the system itself out altogether.

30 TAC §295.91 Table X — these are what make a narrow waterfront lot hard **VERIFIED**

FROM	TO	MINIMUM SEPARATION
Private well or cistern	Soil absorption or spray field	100 ft
Private well or cistern	Septic tank	50 ft
Lake or pond, at normal pool	Soil absorption / unlined evapotranspiration bed	75 ft
Lake or pond, at normal pool	Surface (spray) application	50 ft
Property line	Spray field	10 ft (and no spray across a line)

TEST THIS ON PAPER BEFORE YOU BID

Take the lot plan in §13–17, and lay onto it: a 2,400–2,800 sq ft house at 30 ft finished floor; a garage, the field, the equal reserve, a well 100 ft from both, the 75 ft water setback, and your garden. On **Lot 2 at 187 ft wide** and on **Lot 4 at 123 ft wide** this is the test that decides whether the lot works at all. Lot 1 at 1.95 acres is the only one where it is not close.

21 • Cost to build — rebuilt with the pad and the soil in it

The second edition carried fill at \$0–\$8,000 and treated it as optional. §11 and §12 show it is mandatory on every lot, at 2–6 ft. That single line, plus the vertisol foundation upcharge on Lots 3 and 4, is most of the change here.

One lot, a 2,400–2,800 sq ft five-bedroom house. [ESTIMATE](#)

ITEM	LOW	HIGH	NOTE
County development / building permit (flood zone)	\$165	\$300	One combined permit. 2015 schedule: \$75 + \$0.04/sf. A later county sheet shows \$100 for residential; the full document could not be retrieved, so confirm the current fee. UNVERIFIED
Fill & grading permit	\$0	\$80	
Contractor IRC registration	\$0	\$0	Required before the permit issues
OSSF site and soil evaluation	\$350	\$600	Buy this first
OSSF permit to construct	\$300	\$500	
OSSF system installed	\$8,000	\$25,000	Class III on Lots 1–2, Class IV aerobic on Lots 3–4
Water well, pump and pressure tank	\$10,000	\$20,000	
Water treatment for coastal groundwater	\$0	\$8,000	Test before you assume \$0
Boundary and topographic survey	\$1,500	\$3,500	
Elevation certificate	\$500	\$900	
LOMR-F preparation	\$500	\$1,200	Fill forecloses the fee-free LOMA route
Driveway culvert and county road access	\$1,500	\$5,000	
Electric service extension	\$0	\$25,000	Get this quoted per lot
Propane tank and set	\$1,000	\$3,000	No natural gas here
Clearing and grubbing	\$1,500	\$6,000	
Engineered pad and imported fill	\$12,400	\$77,800	Calculated per lot in §22. Lot 2 \$12.4–28.3k; Lot 3 \$24.3–50.7k; Lot 1 \$32.0–65.3k; Lot 4 \$29.3–77.8k
Vertisol foundation upcharge	\$0	\$20,000	Lots 3 and 4 only — post-tensioned or piered for LEP 19
POA architectural review, transfer and resale certificate	\$500	\$750	
Pre-construction subtotal	~\$38,000	~\$198,000	v1: \$41–47k □ v2: \$26–108k

A PERMIT BLOCKER ON LOT 3 THAT NO EARLIER EDITION CAUGHT

The county's residential requirements sheet states that an **application will not be accepted without a correct, verified 911 address and signature**. **Lot 3 has no street number of record** — its situs reads **HIGHWAY 35** (§3). That makes 911 addressing a **prerequisite to permitting on that lot, not an administrative tidy-up**, and it is the same office that assigns the address, which is why the question is put in that lot's letter (Appendix B.3). The same sheet confirms the sequence: **Environmental Health must approve the septic first** and a copy of the septic permit accompanies the building-permit application — so the soil evaluation is not merely the cheapest thing to buy first, it is the gating item.

Central planning case **\$60,000–\$95,000**. The three variables that decide where you land are, in order: **soil class**, **depth of fill**, and **distance to power**. All three are lot-specific, and all three can be resolved for under \$1,000 and three phone calls.

All-in cost of putting a family into a house on one of these lots

COMPONENT	LOW	HIGH
Land, one lot	\$45,000	\$82,500
Pre-construction, above	\$38,000	\$198,000
House, 2,400–2,800 sq ft at \$175–\$250/sq ft ESTIMATE	\$420,000	\$700,000
All-in, one lot built	~\$505,000	~\$980,000

PUT THE LOT PRICE IN PROPORTION

The whole spread between the cheapest and dearest lot is **\$55,000**. The spread on the **pad alone is \$28,000** between Lot 2 and Lot 4 at mid-case (§22), on the septic **\$17,000**, on the foundation **\$20,000**, and on the electric extension **\$25,000**. Choosing the lot on its asking price, rather than on its soil and its elevation, optimises the smallest of the five.

22 · The pad — what the flood headroom actually costs

§11 established that the finished floor must reach 30 ft and that no lot is high enough to build at grade. This prices that, lot by lot, from the measured ground.

HOW THE NUMBER IS BUILT

A 5-metre grid of ground elevations was sampled from the USGS 3DEP 1 m DEM **inside each recorded boundary** (141–325 points per lot). The pad goes where it costs least, subject to its side slopes fitting inside the boundary and staying **30 m clear of mapped water** — which keeps the house off the bank and, on Lot 4, off the Flag Lake levee. Pad top is **29.5 ft**, half a foot below the floor for a 6-inch slab; fill is measured from the stripped surface. Volumes are the exact frustum with **3:1 side slopes**, because plan area × depth understates a deep pad badly — the slope wedge grows with the square of the lift and the corners with the cube.

Pad top 29.5 ft · 69 × 82 ft pad for a ~3,040 sq ft house and garage plus a 10 ft working margin · 3:1 slopes · fill at \$16–\$30 per compacted cubic yard placed.

ESTIMATENEW IN V3

LOT	GROUND AT THE PAD	LIFT REQUIRED	FILL (CU YD)	PAD + SLOPE TOE	COST RANGE	MID-CASE
1127 Saddle Horn Bend	25.3 ft	4.2 ft	1,416	97 × 110 ft	\$31,997 – \$65,255	\$48,600
336 Wagon Wheel Trail W	28.8 ft	0.7 ft	268	76 × 89 ft	\$12,421 – \$28,311	\$20,400
Lot 29 Broken Arrow Trail	26.5 ft	3.0 ft	963	90 × 103 ft	\$24,297 – \$50,729	\$37,500
750 Wagon Wheel Trail	25.7 ft	3.8 ft	1,255	95 × 108 ft	\$29,264 – \$60,101	\$44,700
808 Wagon Wheel Trail	24.8 ft	4.7 ft	1,603	100 × 113 ft	\$35,148 – \$71,198	\$53,200

LOT 2 IS THE FINDING HERE

Its best pad sits on ground at **28.8 ft**, so it needs a lift of **eight inches** and **268 cubic yards**. Every other lot needs three to five feet and a thousand to eighteen hundred yards. Mid-case that is **\$20,400 against \$37,500 to \$58,200** — a saving of \$17,000 to \$38,000 before a brick is laid, on the lot that is also the cheapest to buy and sits on the better of the two soils.

LOT 4 HAS A WIDTH PROBLEM AS WELL AS A FILL PROBLEM

The only ground on Lot 4 high enough to save fill is the **flank of the levee embankment**, and a geotechnical engineer is unlikely to let you found a house there. Taken fully clear of the embankment the pad sits on **24.3 ft**, the lift rises to **5.2 ft**, **1,808 cubic yards**, and the cost to **\$38,630 – \$77,762**.

Worse, that pad plus its 3:1 slopes needs **119 ft of width on a lot only 123 ft wide**. In practice: a retaining wall, steeper engineered slopes, or a smaller house.

AND ON LOT 5 THE PAD DOES NOT FIT AT ALL

808 Wagon Wheel is the same shoreline as Lot 4 and 85 ft along it, but narrower again. The best pad ground clear of the levee is **24.8 ft**, so the lift is **4.7 ft** — the deepest of the five — at **1,603 cubic yards** and **\$35,148 – \$71,198**. The pad and its slopes then need **116 ft of width on a lot only 110 ft wide**: it is short by **6 ft**. Lot 5 is the only one of the five where the modelled geometry fails outright rather than merely running tight. **But the seller's own aerial photograph qualifies this** (§10): both neighbouring parcels on the same street and the same width are **built**, one of them newly and on a visibly raised pad. So the constraint is real but evidently surmountable — by a smaller footprint, a retaining edge, or certified steeper side slopes than the 3:1 this model assumes. What it is not is a reason to assume the standard pad price. Retaining structures, certified steeper slopes or a deliberately narrow footprint would all have to be priced before an offer — which is one of the questions put to the county in Appendix B.

WHAT SITS INSIDE THOSE FIGURES — LOT 1 AS THE WORKED EXAMPLE

The same nine line items are priced on every lot — only the quantities move with the lift. Itemised in docs/EVIDENCE.md. Gulf Coast planning rates, not quotations.

GROUP	CONTENTS	LOW	HIGH
Earthworks	Strip and stockpile topsoil, imported select fill placed and compacted in lifts, topsoil and turf to the slopes	\$25,196	\$47,675
Engineering	Geotechnical borings and report, engineered pad and drainage plan, compaction density testing	\$5,200	\$12,000
Compliance	Erosion and sediment control, drainage works so runoff is not pushed onto the road or a neighbour, county fill and grading permit	\$1,600	\$5,580
Pad package, Lot 1		\$31,997	\$65,255

WHY NOT ELEVATE THE HOUSE ON PIERS INSTEAD

It is the standard coastal-Texas alternative, and here it is the wrong answer. Pier-and-beam or a stem wall runs roughly **\$26–\$44 per square foot** of floor area — about **\$106,000** mid-case on a 3,040 sq ft footprint — and that is nearly flat with height. A fill pad only becomes as expensive at about **9.3 ft of lift**. None of these five is close, so **fill is correct on all five**. Revisit it only if a written BFE comes back above about 31 ft.

WHAT MOVES THESE NUMBERS

- **The written BFE.** Every extra foot adds roughly **350–450 cubic yards** and **\$8,000–\$14,000** per pad. A BFE of 29 ft rather than 28 ft would cost more than the entire land-price gap between Lot 2 and Lot 3.
- **Haul distance.** The \$16–\$30 per yard spread is mostly haul. Local bank sand is the low end, imported select clay-sand with a long haul the high end. Two phone calls to pits narrow this more than any other input in the whole study.
- **House size and slopes.** 2,400 sq ft instead of 3,040 takes about 15% off every figure; flatter 4:1 slopes cost about 20% more fill and do not fit on Lot 4 at all.
- **Drainage.** The restrictions forbid impairing drainage of streets, lots or ditches (\$19), so the \$1,000–\$4,000 line is not optional.

23 · Annual carrying cost — with the tax model corrected

The second edition's tax model included an Angleton-Danbury hospital district levy and an Angleton drainage district levy. Checked parcel by parcel against the county's taxing-district layers, **these lots are in neither** — nor in any junior-college district or MUD.

Brazoria County Truth-in-Taxation five-year summary, cross-checked against the county taxing-district GIS layers

TAXING ENTITY	RATE PER \$100 (TY2025)	APPLIES TO THESE LOTS?
Brazoria County	0.304758	Yes VERIFIED
Columbia-Brazoria ISD	0.953000	Yes — all five lots VERIFIED
Emergency Services District 1 and 2	up to 0.100000 each	Yes — rate not confirmed; statutory cap used ESTIMATE
Angleton-Danbury Hospital District	0.074685	No — no hospital district reaches these parcels CORRECTED
Angleton Drainage District	0.052816	No — county-wide drainage only CORRECTED
Brazosport / Alvin Junior College District	—	No — neither district reaches these parcels NEW
Effective combined rate	1.2578% - 1.4578%	

Texas reappraises on sale, so plan on the higher tax line from year two

ITEM	BASIS	ALL FIVE LOTS	ONE LOT (1127 SADDLE HORN BEND)
Property tax, on the current appraised value	1.26–1.46% of \$256,180 / \$65,030	\$3,223–\$3,735	\$818–\$948
Property tax, once reappraised to what you pay	1.26–1.46% of \$334,500 / \$82,500	\$4,208–\$4,876	\$1,038–\$1,203
POA dues	\$400 per lot per year UNVERIFIED	\$2,000	\$400
Vacant-lot mowing charge	\$125 per lot per year UNVERIFIED	\$625	\$125
Total annual carry while vacant		\$5,848–\$6,360	\$1,350–\$1,730

THE DRAG ON FIVE LOTS

\$5,848–\$6,360 a year is **1.7–1.9% of the \$334,500 land basis**, every year, on land that produces nothing. Over three years, \$17,500–\$19,100. Add the 30.6% premium over appraised value and the multi-lot investment case needs Bar X Ranch land to appreciate roughly **4–5% a year just to break even**.

THE DRAG ON ONE LOT

\$1,350–\$1,730 a year, and it stops being dead money the day you build. Once the house is standing you also become eligible for the Texas **homestead exemption**, which the vacant-land case cannot claim — a material saving the earlier editions never mentioned.

POA dues and the mowing charge come from listing copy for other Bar X Ranch lots, not from the association. Confirm both, and the transfer fee, on a POA resale certificate. §19 shows the mowing charge is grounded in §3.13 of the recorded restrictions.

24 · Wind, storm and insurance

You asked about safety from storms. On the coast this is two separate questions — what the building code makes you build, and what the insurance costs — and the answers are better than you might fear for an address 28 miles from the Gulf.

WIND ZONE — ESTABLISHED FOR THE FIRST TIME IN THIS EDITION

The Texas Department of Insurance divides Brazoria County into three windstorm zones, and **the dividing line between Inland I and Inland II runs along State Highway 35** — the highway this subdivision fronts. All five lots lie on the **seaward side** of SH 35 (between 0.09 and 1.03 miles south of it), which places all five in **Inland I: a 120 mph three-second-gust design wind speed** under the 2006 IBC/IRC with Texas revisions. For comparison, Surfside Beach and Quintana on the shore are Seaward at 130 mph, and Bailey's Prairie and West Columbia inland are Inland II at 110 mph.

REQUIREMENT	WHAT IT MEANS HERE
Design wind speed	120 mph 3-second gust, TDI Inland I NEW IN V3
Certificate of compliance	A WPI-8 is required, and the application must be made before construction begins . Brazoria is a designated catastrophe area. VERIFIED
Who signs it	A TDI-appointed engineer for new construction in a first-tier county
Why you want it anyway	Without a WPI-8 the property is not insurable through TWIA, which is the residual market most coastal Texas homes depend on
Storm surge	Not the governing threat at this distance inland — the nearest Gulf shoreline is 28 mi by road. Wind and rainfall are.
Rainfall	The wettest year in the 1991–2020 record delivered 2,024 mm against a 1,177 mm average. This, not surge, is what floods Bar X Ranch.

COVERAGE	NOTE	ESTIMATED ANNUAL
Flood — NFIP or private	Risk Rating 2.0 prices on first-floor height and distance to water , so waterfront costs more and the 30 ft pad helps. NFIP building cover caps at \$250,000; excess flood needed above that.	\$1,500–\$4,000
Windstorm — TWIA	State average residential premium \$2,541 as at 30 June 2026; the 2027 filing directs no rate increase, with a ~3% automatic dwelling-coverage uplift on renewals from 1 Sept 2026. VERIFIED	\$2,500–\$4,000
Homeowners, excluding wind and flood	Fire, liability, contents	\$1,000–\$1,500
Total once built ESTIMATE		\$5,000–\$9,500

TWO THINGS TO UNDERSTAND ABOUT THE FLOOD LINE

A LOMA, if you ever obtained one, would lift the *federal mandatory-purchase* requirement — it would not remove the exposure, and your lender may still insist on cover. But §11 shows you will be placing fill, and **fill forecloses the LOMA route** and pushes you into a LOMR-F, which carries a FEMA fee and a heavier burden of proof. Plan on carrying flood insurance permanently. Windstorm cover is unaffected by any of this.

25 · Living here — the weather, in degrees Celsius

A humid subtropical Gulf coast climate: long, hot, wet summers, short mild winters, almost no frost, and a 320-day growing season that is the single best thing about gardening here.

ERA5 reanalysis at the parcels, daily 1991–2020, aggregated to monthly means. Fahrenheit shown only for cross-reference with local sources. NEW IN V3

MONTH	MEAN DAILY MAX °C	MEAN DAILY MIN °C	MEAN °C	RAINFALL MM	°F MAX / MIN
Jan	17.3	9.3	13.3	96	63 / 49
Feb	19.1	11.0	15.1	79	66 / 52
Mar	22.0	14.1	18.1	90	72 / 57
Apr	25.2	17.4	21.3	96	77 / 63
May	28.7	21.5	25.1	89	84 / 71
Jun	31.2	24.4	27.8	107	88 / 76
Jul	32.1	25.2	28.6	90	90 / 77
Aug	32.5	25.2	28.9	98	90 / 77
Sep	30.2	23.1	26.6	121	86 / 74
Oct	26.7	18.9	22.8	109	80 / 66
Nov	21.8	14.0	17.9	103	71 / 57
Dec	18.3	10.5	14.4	99	65 / 51
Year	25.4	17.9	21.7	1,177	78 / 64

WHAT THE NUMBERS FEEL LIKE

- **Summer is the constraint.** July and August average **32.5 °C by day and 25 °C at night** — it is the humidity and the warm nights, not the peak, that wear people down. About **51 days a year reach 32 °C**, 8 reach 35 °C, and 38 °C is rare (0.5 days a year). The 30-year maximum was **41 °C**.
- **Winter barely exists.** January averages 17.3 °C by day and 9.3 °C at night. Air frost occurred in only **18 of 30 years**, averaging **1.9 frost days**. The 30-year minimum was **-6 °C**.
- **Rain is even, and then it isn't.** 1,177 mm a year spread remarkably evenly, 79–121 mm every month, with a September peak. But the wettest single year delivered **2,024 mm** and the driest **488 mm** — a fourfold swing. Design the garden and the drainage for both.

THE GARDENING CALENDAR

Mean last spring frost	2 February
Mean first autumn frost	19 December
Frost-free growing season	~320 days
Earliest / latest last spring frost	5 Jan / 5 Mar
USDA hardiness zone	9a–9b
Annual mean temperature	21.7 °C

FOR A GARDENER THIS IS CLOSE TO A GIFT

Two full growing seasons a year, and a winter mild enough for brassicas, alliums, greens, carrots and peas from September through March. Citrus, figs, pomegranates, loquats and olives are all viable. What defeats people is **July and August**, when most vegetables stop setting — the local practice is to grow hard from February to June, rest or cover-crop through high summer, then plant a second crop in September.

THREE CLIMATE REALITIES THE BROCHURES LEAVE OUT

Humidity drives fungal disease — choose disease-resistant varieties and space for airflow. **Mosquitoes** are a genuine quality-of-life factor beside a bayou or a pond in a subtropical climate; Brazoria County runs a mosquito-control programme, and you will use it. **Hurricane season** runs June to November, and the practical consequence for a gardener is that anything tall or trellised needs to come down or be strapped when a storm is named.

26 · Living here — natural hazards, ranked by the federal index

You asked specifically about flood, storm and fire. FEMA's National Risk Index scores every US county on eighteen hazards. This is Brazoria County, December 2025 edition.

FEMA National Risk Index, Brazoria County (FIPS 48039). County composite: **Relatively Moderate**. Social vulnerability: Relatively Low. Community resilience: Very High. **NEW IN V3**

HAZARD	COUNTY RISK RATING	ANNUALISED FREQUENCY	COUNTY EXPECTED ANNUAL LOSS
Riverine flooding	RELATIVELY HIGH	1.86 events/yr	\$78.2 m
Hurricane	RELATIVELY HIGH	0.22 events/yr	\$43.6 m
Tornado	RELATIVELY HIGH	1.11 events/yr	\$20.9 m
Lightning	RELATIVELY HIGH	70.0 events/yr	\$2.3 m
Ice storm	RELATIVELY HIGH	—	—
Coastal flooding	RELATIVELY MODERATE	3.74 events/yr	\$2.0 m
Strong wind	RELATIVELY MODERATE	1.03 events/yr	\$0.8 m
Heat wave	RELATIVELY MODERATE	14.9 events/yr	\$5.0 m
Cold wave	RELATIVELY MODERATE	—	—
Drought	RELATIVELY MODERATE	28.5 months/yr affected	\$1.4 m
Hail	RELATIVELY LOW	1.59 events/yr	\$0.4 m
Wildfire	RELATIVELY LOW	0.004 events/yr	\$0.9 m
Winter weather	VERY LOW	—	—
Earthquake	VERY LOW	—	—
Landslide	VERY LOW	—	—

WILDFIRE — YOUR BEST ANSWER

Relatively Low, at an annualised frequency of **0.004**. This is coastal prairie and cropland on heavy, moist clay, criss-crossed by bayous, with no forest canopy and no slope. Wildfire is close to a non-issue here, and it is one of the few hazards where this location is genuinely better than most of Texas. Grass fires in a drought year are the realistic version of the risk, not a crown fire.

FLOOD — YOUR WORST ANSWER

Relatively High for riverine flooding, at 1.86 events a year and \$78 m of expected annual loss county-wide — the largest single hazard loss in the county. All five lots are in mapped **Zone AE**. Coastal flooding, by contrast, is only Relatively Moderate at this distance inland. **Rain, not surge, is the threat.**

HOW THE HAZARDS ACTUALLY RANK FOR YOU, ON THIS SITE

- 1. **Rainfall flooding — high and permanent.** Zone AE, a 28 ft BFE, a 30 ft floor requirement, and on Lots 3 and 4 a hydrologic group D soil that sheds almost all the rain that lands on it. This is the hazard that shapes the build, the insurance and the resale.
- 2. **Hurricane — high, and manageable by design.** 0.22 events a year. Twenty-eight miles inland puts you outside the surge zone; a 120 mph Inland I structure with an engineer-certified WPI-8 is a genuinely robust house. Expect to lose power, not the roof.
- 3. **Tornado — high frequency, low individual probability.** 1.11 events a year across a 1,494 sq mi county. Worth a safe interior room; not worth losing sleep over.
- 4. **Lightning — high, at 70 events a year.** The one hazard most people under-rate. Surge protection on the well pump, the aerobic septic controller and the HVAC is cheap insurance.
- 5. **Heat — moderate and rising.** 14.9 heat-wave events a year. Relevant to the garden, to poultry if you ever get permission, and to your cooling bill.
- 6. **Hail, ice storm, cold wave — low to moderate.** The February 2021 freeze is the local memory; plan for a few days without power and lag the wellhead.
- 7. **Earthquake, landslide, winter weather — very low.** Ignore.

AND ONE SITE-SPECIFIC HAZARD THE INDEX CANNOT SEE

Lot 4 abuts the Flag Lake Levee (National Inventory of Dams TX06298), and §16 shows the 101-acre pond is impounded *above* the buildable part of that lot. NID publishes no hazard classification and no condition rating for the structure. Lot 1 lies downstream of Bar X Development Dam (TX01759), which NID does rate, as low hazard potential. A county-level index will never tell you this; ask TCEQ Dam Safety.

27 · Living here — services, shopping, school and hospital

Bar X Ranch is rural but not remote. The honest summary: **nothing is far, and nothing is close**. Almost every daily errand is a 12–20 minute drive, there is no walkable anything, and a second car is not optional.

DAILY ESSENTIALS	MILES	DRIVE MIN	NOTE
H-E-B supermarket, West Columbia	6.7	13	nearest full supermarket
Valero fuel + convenience, Hwy 35	4.2	9	nearest fuel
Walgreens pharmacy, West Columbia	6.6	13	nearest pharmacy
Brazoria Community Library	2.9	11	nearest public building of any kind
H-E-B supermarket, Angleton	9.9	18	
Kroger, Angleton	10.1	18	
Walmart Supercenter, Angleton	10.2	19	
Buc-ee's, Hwy 288	7.4	14	regional travel stop
Angleton town centre / county courthouse	9.0	16	county seat
Walmart Supercenter, Lake Jackson	15.8	26	

HEALTH CARE	MILES	DRIVE MIN	NOTE
UTMB Health Urgent Care	7.3	14	nearest urgent care
AngletonER (freestanding emergency)	9.9	18	24 h emergency
UTMB Health Angleton-Danbury Campus	11.3	20	nearest full hospital + ER
Sweeny Community Hospital	14.7	27	
St Luke's Health Brazosport, Lake Jackson	16.9	27	larger acute hospital
Memorial Hermann Sugar Land	44.7	66	
Texas Medical Center, Houston	47.8	63	tertiary / specialist care

THE ONE SURPRISE IN THIS TABLE

Your nearest supermarket is **not** in Angleton. The H-E-B in **West Columbia is 6.7 miles and 13 minutes**, against 9.9 miles and 18 minutes to the Angleton H-E-B. The mailing address says Angleton; the shopping trip goes west. Same for the nearest pharmacy, police station and library — the Brazoria Community Library is **2.9 miles** away, easily the closest public building of any kind.

28 · Living here — schools, shopping and going out

SCHOOLS — COLUMBIA-BRAZORIA ISD	MILES	DRIVE MIN	NOTE
West Columbia Elementary	7.0	14	
Columbia High School	7.1	14	
Wild Peach Elementary	12.3	23	
West Brazos Junior High	13.8	24	
Brazosport College, Lake Jackson	16.5	27	nearest college (approx.)

SHOPPING, DINING, GOING OUT	MILES	DRIVE MIN	NOTE
Margarita Jones / Republic BBQ, West Columbia	6.5	12	nearest sit-down restaurants
Elroy Floyd's / Damifino	8.8	16	nearest bars
Cooter Browns Country Club, Brazoria	8.9	23	nearest live-music venue
AMC Classic Brazos 14 cinema	15.6	26	nearest cinema
Brazos Mall, Lake Jackson	15.6	26	nearest enclosed mall
Wayside Pub, Lake Jackson	16.4	26	
Pearland Town Center	36.3	49	first large-format retail
The Strand / downtown Galveston	60.0	92	nightlife district (approx.)
Downtown Houston	50.6	67	full metropolitan nightlife

SCHOOLS — READ THIS CAREFULLY

All five lots are in **Columbia-Brazoria ISD**, confirmed parcel by parcel against the county's school-district layer — **not** Angleton ISD, despite the Angleton postal address. The campuses are in Brazoria and West Columbia, 7–14 miles west and south. Confirm the actual attendance zone for your lot directly with CBISD before you buy: district boundaries and campus assignments are different things, and this document deliberately does not reproduce school performance ratings, because the only dataset available to it is a decade out of date.

NIGHTLIFE — SET YOUR EXPECTATIONS

Locally it is a handful of bars 16 minutes away and one country music venue in Brazoria at 23 minutes. A cinema and an enclosed mall are 26 minutes, in Lake Jackson. Anything you would recognise as a night out — restaurants with a wine list, live music with a choice of venue, theatre, clubs — is **Houston at 67 minutes** or **Galveston at 90**. That is a designated-driver drive, not a taxi ride. If frequent nightlife matters, this is the weakest column in the whole assessment.

29 · Living here — coast, resorts, amusements and the outdoors

COAST, RESORTS AND AMUSEMENTS	MILES	DRIVE MIN	NOTE
The Wilderness Golf Course	17.0	28	nearest golf
Sea Center Texas, Lake Jackson	18.4	29	aquarium + hatchery, free
San Bernard National Wildlife Refuge	19.1	41	
Surfside Beach	28.3	42	nearest Gulf beach
Brazos Bend State Park	31.0	51	
Space Center Houston	44.9	72	
Kemah Boardwalk	51.0	81	
Moody Gardens, Galveston	59.4	92	
San Luis Resort, Galveston	59.0	91	nearest full resort hotel
Galveston Pleasure Pier / Schlitterbahn waterpark	60.2	91	Schlitterbahn is seasonal
Galveston Island seawall	61.2	93	

WHAT A WEEKEND LOOKS LIKE

- **Within 30 minutes:** your own two community lakes with boat ramps and a fishing pier; Sea Center Texas at Lake Jackson (a free state aquarium and fish hatchery, genuinely good with children); a golf course; and **Surfside Beach at 42 minutes** — a real Gulf beach you can drive onto.
- **Within an hour:** Brazos Bend State Park, one of the best birding and alligator-watching parks in Texas; the San Bernard National Wildlife Refuge at 41 minutes; Space Center Houston at 72.
- **90 minutes:** Galveston Island — the Pleasure Pier, Moody Gardens, Schlitterbahn waterpark (seasonal, roughly May to September), the Strand, and the San Luis Resort. This is the family holiday destination, and it is a comfortable day trip rather than a stay.
- **Kemah Boardwalk** at 81 minutes covers the amusement-park itch without going to Houston.

SCENERY AND NATURE — THE REAL DRAW

This is the column where the location genuinely delivers, and it is why people move here. Bar X Ranch is 3,200 acres of large wooded lots, century live oaks, two lakes and bayou frontage in the Bastrop Bayou watershed. Bar X listings describe deer, hogs, raccoons, squirrels, bald eagles and a wide range of birds; the Central Flyway runs directly overhead, which makes spring and autumn migration exceptional from your own garden.

The lot choice decides how much of this you get. Lot 4 fronts a 101-acre lake. Lot 1 fronts Mill Bayou along roughly half its perimeter, with mature trees. Lot 3 has good frontage on a 12.6-acre pond. Lot 2 has the least — a short frontage on the same pond.

THE NATURE YOU MAY NOT WANT

Coastal Brazoria County bayous and ponds hold **alligators**, and water moccasins are common. With children, dogs, or waterfowl, a waterfront lot in this county needs a fence and a rule about the water's edge. Feral hogs will find a vegetable garden, and raptors, raccoons and coyotes are exactly why the poultry question in §19 would have needed a well-built run anyway.

30 · Living here — the neighbourhood, and the Indian community

You asked for a good, developed neighbourhood. On the census evidence this is a markedly affluent, stable, almost entirely owner-occupied rural neighbourhood — and one with essentially no Indian community in it.

US Census Bureau, American Community Survey 2024 five-year estimates (2020–2024). NEW IN V3

MEASURE	CENSUS TRACT 6625 (CONTAINS ALL FIVE LOTS)	BRAZORIA COUNTY	TEXAS
Population	3,452	391,255	30,188,424
Median age	42.3	36.7	35.6
Median household income	\$116,550	\$97,993	\$78,476
Median owner-occupied home value	\$384,100	\$301,600	\$283,800
Owner-occupied share of homes	96.9%	74.1%	62.6%
White alone	76.4%	47.7%	48.5%
Black or African American alone	6.2%	16.2%	12.2%
Asian alone	0.2%	7.4%	5.6%
Two or more races	16.7%	21.1%	23.5%
Hispanic or Latino (any race)	29.6%	31.6%	39.7%
Asian Indian (alone or in combination)	none reported	6,414 (1.6%)	588,500 (1.9%)

THE NEIGHBOURHOOD IS GENUINELY STRONG

Median household income of **\$116,550** is 19% above the county and 49% above Texas. **96.9% of homes are owner-occupied** — against 74% county-wide — which is an unusually low-churn, invested neighbourhood. Median home value is \$384,100, comfortably above the county's \$301,600, and the median age of 42.3 points to established families rather than a transient population. Bar X Ranch has been developed since 1980, has concrete streets, and is governed by a working POA that maintains frontages and amenities.

THERE IS NO INDIAN COMMUNITY HERE

The tract records **7 Asian residents out of 3,452** — 0.2% — and **no Asian Indian population at all** in the ACS estimate. Brazoria County as a whole has **6,414** people of Asian Indian origin, 1.6% of the county, but they are concentrated 30–40 miles north around Pearland, not here. If cultural community, temple attendance, Indian grocery shopping and a peer group for children matter to you day to day, this address does not supply them locally — it supplies them at 55 to 75 minutes each way.

INDIAN COMMUNITY	MILES	DRIVE MIN	NOTE
The Monk's Indian Bistro	35.5	48	nearest Indian restaurant
Sri Meenakshi Temple, Pearland	39.5	58	largest South Indian temple in the region
Gayatri Bhavan (South Indian)	40.5	58	
HMM Vitthal Rukmini Mandir, Rosenberg	42.0	58	
Desi Brothers Farmers Market, Sugar Land	42.9	62	nearest South Asian grocery
BAPS Shri Swaminarayan Mandir, Stafford	45.1	67	
Mahatma Gandhi District (Hillcroft), Houston	54.7	73	main Indian commercial district

ONE GENUINELY ENCOURAGING FACT

Sri Meenakshi Temple — the largest South Indian temple complex in the region and the third Hindu temple built in the United States — is itself in unincorporated Brazoria County, with a Pearland postal address. It is the same county as your lots, 39.5 miles and about 58 minutes north. The Houston metropolitan area has one of the largest Indian populations in the United States, and the Mahatma Gandhi District on Hillcroft is 73 minutes away. The community exists and it is substantial; it is simply at the other end of the county.

AIRPORTS	MILES	DRIVE MIN	NOTE
Texas Gulf Coast Regional (LBX)	11.8	29	general aviation only — no scheduled service
Houston Hobby (HOU)	49.5	71	nearest international airport
Houston Bush Intercontinental (IAH)	70.4	95	long-haul hub

NEAREST INTERNATIONAL AIRPORT

Houston Hobby (HOU) — 49.5 miles, 71 minutes — is the nearest airport with international service, and the practical choice for domestic flying. **Bush Intercontinental (IAH) — 70.4 miles, 95 minutes** — is the long-haul hub and the one that matters for direct flights to India. Texas Gulf Coast Regional is only 11.8 miles away but is a general-aviation field with no scheduled service. Budget **two hours to IAH** in practice; the 95-minute figure is free-flowing traffic, and the route crosses Houston's southern suburbs.

31 · Community amenities, the lakes and fishing

The POA amenity base is the main thing your \$400 a year buys, and it is better than the original portfolio described.

WHAT THE POA MAINTAINS

- **Two stocked lakes** with boat ramps and a fishing pier
- **Two swimming pools**
- **Two clubhouses** — a lake house and a clubhouse, available to owners
- Tennis courts and basketball courts
- Two playgrounds, pavilions and picnic areas
- Campgrounds
- Concrete streets throughout the 3,200-acre subdivision
- Frontage mowing on vacant lots — charged to the owner under §3.13

POA office: 1169 Bar X Trail, Angleton TX 77515 · barx ranch.org

CORRECTING THE FISHING CLAIMS

- Texas requires **no fishing licence** on water wholly enclosed within private property — and where that exemption applies, **no state bag or size limits apply either**. So the “10 catfish per day” in the original document cannot be state law. It can only be a **POA house rule**. **VERIFIED**
- **The private-water status is itself questionable**. The exemption requires the water not be subject to overflow from public water — and these lots sit in a mapped 1%-annual-chance floodplain in the Bastrop Bayou watershed, beside an impounded 101-acre pond. The flood finding undercuts the fishing premise.
- Statewide baselines, if the water is public: blue and channel catfish 25 per day combined, flathead 5 with an 18 in minimum, largemouth bass 5. **Black drum**, named in the original as an on-site species, is a brackish and saltwater fish — a bad data pull.
- The beach is **42 minutes**, not the “20 minutes” the original claimed.


WHAT THE WATER ON YOUR LOT IS, PRECISELY

This matters, because “waterfront” has meant four different things in this portfolio. **Lot 1** fronts **Mill Bayou** and an impounded 13.0-acre widening of it, along roughly half its perimeter. **Lots 2 and 3** front opposite parts of the **same unnamed 12.6-acre pond** — Lot 3 with roughly twice the frontage of Lot 2. **Lots 4 and 5** front **Flag Pond** — called **Flag Lake by the association** — at 101.5 acres, and the levee that impounds it. Only those two are on what most people would call a lake.

A NAMING DISCREPANCY ON LOT 3’S WATER, WORTH KNOWING BEFORE YOU ASK ABOUT IT

Consumer mapping labels the channel along Lot 3’s eastern boundary “**Buffalo Camp Bayou**”. That is a real Brazoria County watercourse — but **the federal hydrography does not carry the name there**. In the National Hydrography Dataset the reach beside Lot 3 has **no GNIS name at all**: it is **FCode 46003**, intermittent stream, alongside an **FCode 55800** artificial path through the impounded water. The nearest reach NHD actually names Buffalo Camp Bayou is **4.2 miles** away, by Buffalo Camp Bayou Reservoir. The label is a name applied further upstream than the official dataset applies it. **Why it matters practically**: when you write to the county for the base flood elevation (§25, Appendix B), asking about “Buffalo Camp Bayou” may not match the cross-section the floodplain administrator works from. Ask by **parcel and PID**, and ask the office to name the governing watercourse and cross-section back to you. Do not assume the map label is the regulatory name.

THE POA AMENITY MAP — AND WHAT IT CORRECTS

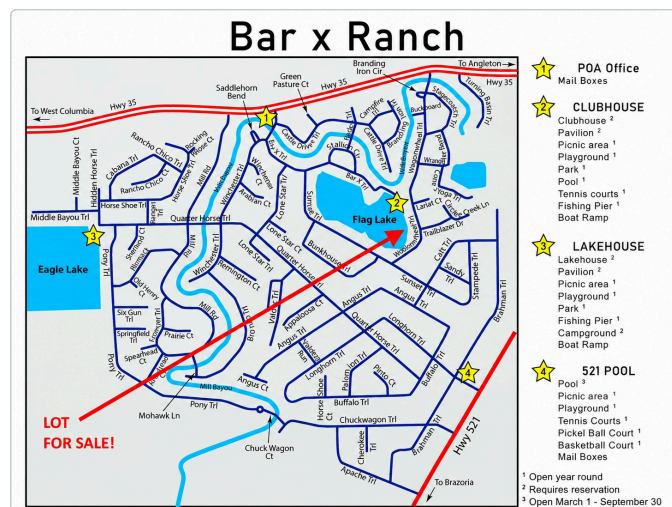


Left: the association’s own amenity map, supplied with the listing. Right: the 521 Pool complex.

Three corrections follow from the map. **The two lakes have names** — **Flag Lake** and **Eagle Lake**, at opposite ends of the subdivision. What the USGS hydrography calls “Flag Pond”, and what this document calls Flag Pond throughout, is **Flag Lake** to the association and to anyone you speak to locally. **The amenities sit at four separate nodes, not two**, and **two of the three most useful carry conditions** no earlier edition recorded.

NODE	ON	WHAT IS THERE	CONDITIONS
1 · POA Office	Hwy 35, Saddlehorn Bend	Mail boxes	Year round
2 · Clubhouse	Flag Lake	Clubhouse, pavilion, picnic area, playground, park, pool , tennis courts, fishing pier , boat ramp	Clubhouse and pavilion by reservation ; rest year round
3 · Lakehouse	Eagle Lake	Lakehouse, pavilion, picnic area, playground, park, fishing pier , boat ramp , campground	Lakehouse, pavilion and campground by reservation
4 · 521 Pool	Hwy 521, south-east	Pool, picnic area, playground, tennis courts, pickleball , basketball, mail boxes	Pool 1 March – 30 September only

WHAT THIS CHANGES FOR THE FISHING BRIEF

There are two fishing piers and two boat ramps, not one of each — a pair on Flag Lake at the Clubhouse and a pair on Eagle Lake at the Lakehouse. That is better than earlier editions recorded. But note the conditions: the **521 pool is closed October to February**, and the clubhouse, lakehouse, pavilions and campground all **require a reservation**, so they are not facilities you can simply walk into. The piers, ramps, parks, playgrounds and the Clubhouse pool are the year-round, no-booking ones. Confirm the reservation rules and any fees against the POA resale certificate — they are association policy and can change.

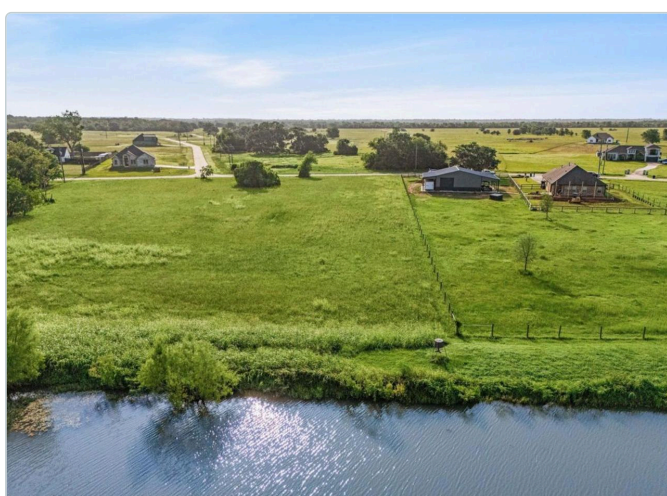

Association water from the shore, across cleared pasture. Earlier editions carried this frame as unattributable. The de-duplication in **Appendix D** narrows it: the frame was supplied **only under the 808 Wagon Wheel Trail listing** and under no other, which points to **Flag Lake beside Lots 4 and 5** rather than the Lots 2–3 pond this caption previously suggested. That is provenance, not proof — there is still no location data, because WhatsApp stripped the EXIF — so it is offered as the likely reading, not a certain one. Note the **marshy, reed-grown margin** either way: that is the zone the TCEQ 75 ft absorption setback in §20 measures back from, and it is not usable ground.



AREA CONTEXT A fishing pier at dusk — one of the two the amenity map records. Which of the two is not established.



AREA CONTEXT Flag Lake from the air at its full 101.5 acres. This frame was supplied under **three different addresses** — see **Appendix D**.

WHEN THE BAYOU RUNS DRY, AND WHAT IS ACTUALLY STOCKED

Mill Bayou is an intermittent stream. The National Hydrography Dataset classifies the named reach beside Lot 1 as **FCode 46003 — Stream/River, Intermittent** : by definition it carries water only part of the year. The reaches nearer Lots 2–5 are different things again — an **artificial path** through an impounded pond on Lots 2 and 3, and a **canal/ditch** (**FCode 33600**) 94–167 ft from Lots 4 and 5.

No gauge exists on Mill Bayou, and the nearby coastal-prairie gauges hold no discharge record, so the dry window has to be derived rather than read off. Rainfall here is **not** strongly seasonal — the driest month, February, still averages 79 mm. What drives a coastal-prairie channel dry is **evaporation exceeding rainfall**. Thornthwaite potential evapotranspiration on this document's own ERA5 normals gives:

Thornthwaite PET from ERA5 1991–2020 monthly normals at the parcels; heat index I = 113.3, a = 2.513, corrected for 29° N daylight. Annual balance is -9 mm — essentially break-even, which is why the channel recovers each winter.

MONTH	RAIN (MM)	PET (MM)	BALANCE	CHANNEL
May	89	137	-48	drying
June	107	176	-69	low / no flow
July	90	193	-103	driest — pools only
August	98	188	-90	driest — pools only
September	121	140	-19	recovering
October – April	96 avg	50 avg	+38 avg	flowing

EXPECT NO FLOW LATE MAY TO SEPTEMBER

Worst in **July and August**, when evaporation runs roughly double rainfall. In those months an intermittent reach becomes a chain of isolated pools, or a dry bed. **Only Lot 1 is exposed to this** — its nearest open water is the impounded widening, which holds, but the flowing bayou behind it does not. The ponds on Lots 2–5 are **dammed** and keep water year-round, though levels fall.

NOTHING HERE IS STATE-STOCKED

Mill Bayou does not appear in TPWD's stocked water-body list, and neither does Flag Pond. Even **Bastrop Bayou**, the named receiving watercourse and a listed TPWD water body, reports **“no stockings took place this year.”** TPWD stocks public lakes, ponds and bays; an intermittent bayou behind a private subdivision is none of those. The stocked water here is the **POA's own two lakes**, stocked by the association on its terms — which is also why no state licence or bag limit applies to them (§31 above).

What this means for the fishing brief: buy Lot 2, 3, 4 or 5 and you have water outside the window all year. Buy Lot 1 for the bayou and you are buying a feature that is a wooded channel for roughly four months of the summer. The POA lakes are the fishery in every case; the bayou is scenery.

32 · Scorecard against your brief

Twenty-one tests, weighted to what you said matters: gardening, hobby farming, quick access to amenities, a good and developed neighbourhood, scenery and nature, and safety from flood and storm. Green is good, amber is a compromise, red is a problem.

TEST	LOT 1 1127 SADDLE HORN	LOT 2 336 WAGON WHEEL W	LOT 3 29 BROKEN ARROW	LOT 4 750 WAGON WHEEL	LOT 5 808 WAGON WHEEL
Garden soil Asa loam vs Pledger clay — \$18	Excellent	Excellent	Poor	Poor	Poor
Room to garden acres of record	1.95 ac	1.00 ac	1.30 ac	1.00 ac	1.07 ac
Hobby farming — poultry restrictions bar livestock on all five — \$19	Barred	Barred	Barred	Barred	Barred
Hobby farming — horses \$3.15 formula on lot area	3 horses	2 horses	2 horses	2 horses	2 horses
Flood headroom lift needed at the best pad — \$22	4.2 ft	0.7 ft	3.0 ft	3.8–5.2 ft	4.7 ft
Cost of the pad mid-case, calculated — \$22	\$48.6k	\$20.4k	\$37.5k	\$44.7–58.2k	\$53.2k
Land + pad + vertisol foundation the reproducible part of cost-to-build-ready — asking price, calculated pad at mid-case, and the \$20k upcharge on the clay lots. Septic and the electric run are not yet lot-resolved, so they are excluded.	\$131k	\$65k	\$107k	\$123k	\$173k
Rain ponding on the lot hydrologic group	Group B	Group B	Group D	Group D	Group D
Storm exposure all five TDI Inland I, 120 mph	Equal	Equal	Equal	Dam adjacent	Dam adjacent
Wildfire county Relatively Low throughout	Negligible	Negligible	Negligible	Negligible	Negligible
Foundation risk linear extensibility	LEP 4.5	LEP 4.5	LEP 19	LEP 19	LEP 19
Septic cost TCEQ class implied by permeability	\$8–15k	\$8–15k	\$15–25k	\$15–25k	\$15–25k
Septic layout fits? field + 100% reserve + well + setbacks	Comfortable	Tight — 187 ft wide	Workable	Tight — 123 ft wide	Fails — 110 ft wide
Scenic beauty water body and frontage	Mill Bayou, ½ perimeter	Short pond frontage	Good pond frontage	101-acre lake	101-acre lake
Quiet distance to State Highway 35	0.09 mi — noisiest	0.37 mi	0.10 mi — noisy	1.03 mi — quietest	1.03 mi — quietest
Access to amenities all five within 1.5 mi of each other	Equal	Equal	Equal	+2–3 min	+2–3 min
Neighbourhood same tract, same POA, same ISD	Equal	Equal	Equal	Equal	Equal
Jurisdiction county only, or also a city ETJ	County only	Baileys Prairie ETJ	County only	County only	County only
Price asking	\$82,500	\$45,000	\$49,000	\$58,000	\$100,000
Price per acre of record asking ÷ acres of record	\$42,308	\$45,000	\$37,692	\$58,000	\$93,458
Value against county appraisal premium or discount	+26.9%	+25.0%	-5.5%	+16.0%	+87.7%
Green / amber / red	11 / 3 / 4	9 / 5 / 4	5 / 7 / 6	4 / 6 / 10	4 / 2 / 14

CONCLUSION

Buy Lot 2, 336 Wagon Wheel Trail W, at \$45,000, unless the extra acre on Lot 1 is worth about \$66,000 to you. Lot 2 has the better soil, by far the least fill, the lowest price, and the lowest total cost to reach build-ready of the five. Its weakness is size, and only you can price that.

If you want the acreage, buy Lot 1 and open at \$65,000 — the county's appraised value — going to about \$72,000. At the \$82,500 ask you are paying a 26.9% premium to the county's own number on a lot that also needs 1,416 cubic yards of fill.

Do not buy Lots 3 or 4. The Pledger clay costs more in septic and foundation than the land saves; Lot 4 needs the deepest pad, barely has the width for it, and abuts a dam with no published hazard rating.

33 · What changed, edition by edition

The original generated portfolio, the v2 rebuild, and this edition. Only the items where the answer actually moved are listed.

#	ORIGINAL PORTFOLIO SAID	V2 CORRECTED IT TO	V3 ESTABLISHES
1	No parcel identifiers at all	Same — none available	PID, geo ID, legal description, deed reference for all five
2	Lot 29 — 1.0 ac "est."	Unresolved	1.30 ac of record — \$/acre falls to \$37,692
3	750 Wagon Wheel 1.0 or 1.27 ac	Unresolved	1.00 ac of record ; the 1.27 figure is wrong
4	Lot 29 is interior	Repeated as interior	Waterfront — 7 of 13 boundary vertices within 60 ft of a 12.6 ac pond
5	Panel 48039C0605K	Repeated as verified	Panel 48039C0420K , eff. 30 Dec 2020
6	BFE — 24 ft, build at grade	Flagged the range, kept 24 ft as plausible	Nearest published BFE line is 28 ft NAVD88 at every lot
7	Natural ground 28–30 ft	Repeated, flagged unverified	24–28 ft from county LiDAR — so 2–6 ft of fill is mandatory
8	Fill "minimal"	\$0–\$8,000, optional	\$12,000–\$45,000, and not optional
9	Soil class unknown	Unknown; assumed Class III–IV	Asa loam on Lots 1–2, Pledger vertisol on Lots 3–4 — a 43× permeability difference
10	No foundation risk noted	Not noted	LEP 19 on Lots 3–4 — post-tensioned or piered design
11	Minimum dwelling 1,800 sq ft	Repeated, flagged unverified	1,100 sq ft in the recorded instrument
12	"ACC Rev 2" governs all four	Flagged as doubtful	Three different recorded instruments — 1515/679, 1532/471, 84-29/885
13	Silent on animals	Silent	Livestock barred except horses; one horse barn only — poultry very likely prohibited
14	No tax at all	County + CBISD + hospital + drainage districts	County + CBISD + ESD only — no hospital, drainage or college district
15	Carry not modelled	\$5,050–\$5,750/yr on four lots	\$5,848–\$6,360/yr on five, \$1,350–\$1,730 on one
16	Windstorm omitted	TWIA average \$2,541; WPI-8 required	TDI Inland I, 120 mph — the zone boundary follows SH 35
17	Jurisdiction unstated	Unincorporated county	Lot 2 is inside the Baileys Prairie ETJ ; the other four are not
18	Surfside 20 min	~30 min	42 min by road
19	40 catfish/day as state law	Shown to be impossible as state law	Confirmed a POA house rule at most
20	No dam or levee noted	Not noted	Lot 4 abuts Flag Lake Levee (NID TX06298) , unrated; Lot 1 downstream of TX01759
21	Cheapest waterfront framing	Ranked 1127 Saddle Horn cheapest per acre	All five are waterfront ; Lot 29 is cheapest per acre
22	Total 9 pages, no drawings	12 sections, no drawings	True-scale plans and terrain sections for all five lots
23	No photography	Seller frames used as supplied, by filename	71 files audited to 42 distinct scenes — filenames identify listings, not parcels; Lot 3 given a recorded-boundary aerial ; Lot 2 still has no photograph at all (Appendix D)

The full claim-by-claim audit of the original document remains in docs/AUDIT.md. The evidence trail for everything new in this edition, including the exact service queries, is in docs/EVIDENCE.md.

34 · What to do next, in this order

Nine of these cost almost nothing and between them they resolve every remaining material unknown. Do them before you make an offer, not after.

1. **Ask the POA the poultry question in writing.** “May I keep a small number of chickens and ducks, and may I build a coop and a greenhouse?” If the answer is no and that is unacceptable, stop here and look at unrestricted acreage instead — everything below becomes moot. Free. One email to office@barx ranch.org.
2. **Pull the recorded restrictions for the specific lot** from the Brazoria County Clerk — 1515/679 for Sections 1 lots, 1532/471 for Section 2, 84-29/885 for Section 16 — plus a POA resale certificate showing dues, transfer fees and any assessments. Under \$100.
3. **Confirm Lot 29’s identity, and its frontage.** Its situs of record is “HIGHWAY 35” with no street number. Verify the listing refers to **PID 186219** and not another Section 16 lot. In the same call, ask the county whether the **~10 ft of frontage** on the Broken Arrow Trail cul-de-sac (§8) satisfies the minimum frontage for a building permit and a driveway culvert permit. If it does not, nothing else about this lot matters. Free — BCAD, the listing agent and the permit office.
4. **Order an OSSF site and soil evaluation** on the shortlisted lot. This is the highest-value money in the project: it converts \$18’s survey-scale inference into the permit-governing soil class, and it swings the septic budget by up to \$17,000. \$350–\$600.
5. **Request a written BFE determination per lot** from Brazoria County Floodplain & 911 Administration, 451 N Velasco Ste 210, Angleton TX 77515 · 979-864-1295. Ask which cross-section governs the lot — Mill Bayou governs Lot 1 and it is a different watercourse from the one governing Lots 2 and 3. Free.
6. **Get three quotes for the electric service extension**, per lot. This is a \$0–\$25,000 line and the utility will tell you over the phone. Free.
7. **Ask TCEQ Dam Safety about Flag Lake Levee (NID TX06298)** — hazard classification, condition and inspection history — if Lot 4 is still under consideration. And about Bar X Development Dam (TX01759) for Lot 1. Free.
8. **Confirm the school attendance zone** for the specific lot with Columbia-Brazoria ISD, and confirm broadband availability at the address with the providers. Neither can be settled from a desk, and both shape daily life. Free.
9. **Confirm the TDI windstorm zone** for the parcel against TDI’s own Brazoria County map. §24 places all five in Inland I, but the dividing line follows SH 35 and Lots 1 and 3 are within 530 ft of it. Free.
10. **Commission a drone pass on the shortlisted lot**, and ask the agent which parcel each supplied photograph shows and how they know. **Lot 2 has no photograph at all** — see Appendix D — so there it is the only way to see the ground before you commit. On **Lot 3**, brief the surveyor to dimension the cul-de-sac frontage first (§8). \$150–\$400.
11. **Order a boundary and topographic survey** on the lot you intend to buy, then test a real 2,400–2,800 sq ft footprint at 30 ft finished floor against the septic field, the 100% reserve, the well at 100 ft, the 75 ft water setback and your garden. \$1,500–\$3,500.
12. **Get TWIA windstorm and Risk Rating 2.0 flood quotes** on the actual proposed structure, and price excess flood cover above the \$250,000 NFIP building cap.
13. **Then make the offer**, anchored on the county appraised value, and only then commission design.

TOTAL COST OF RESOLVING EVERY REMAINING UNKNOWN

Roughly **\$2,400–\$4,800** and a fortnight, against a build of \$505,000–\$950,000. Steps 1 to 9 cost under \$700 between them and would change the recommendation in this document if any of them came back differently.

Sources, limitations and sign-off

PRIMARY SOURCES USED IN THIS EDITION

SOURCE	USED FOR
Brazoria County public ArcGIS — general/Parcels, general/Floodplain, general/LiDAR, general/Taxing_Entities, general/Legal_and_Development, general/Roads, general/Community_Features	Parcel record, FEMA zone and FIRM panel per parcel, published BFE lines, 1 ft elevation contours, taxing districts, recorded plats and restriction references, street centrelines, school locations
USGS 3DEP 1 m digital elevation model	The A–B terrain profiles in §13–17
USDA NRCS SSURGO , Brazoria County soil survey	Soil series, texture, permeability, shrink-swell, drainage class, hydrologic group (§18)
Bar X Ranch declaration of restrictions as recorded (Deed Vol. 1679, Pg. 695)	Permitted structures, livestock, dwelling size, fences, setbacks, lot maintenance (§19)
30 TAC §295.91 (TCEQ OSSF)	Wastewater flow, tank sizing, loading rates, separation distances (§20)
Brazoria County building permit fee schedule, permit application, floodplain administration	Permit cost, the 24-inch freeboard standard, contact route
FEMA — National Risk Index (Dec 2025), LOMA/LOMR-F guidance, FIS 48039CV001A	Hazard ratings (§26), map-amendment routes, study effective date
Texas Department of Insurance — windstorm zone map and community list for Brazoria County	Inland I 120 mph determination, WPI-8 obligation (§24)
TWIA — published rates and liability report	Windstorm premium (§24)
TPWD — private-water fishing exemption, freshwater bag and length limits	Correcting the fishing claims (§31)
US Census Bureau — ACS 2024 five-year estimates, tract 6625	Demographics, income, tenure, Indian population (§30)
ERA5 reanalysis , daily 1991–2020 at the parcels	Climate normals in Celsius, frost dates, growing season (§25)
OpenStreetMap and OSRM ; National Inventory of Dams	Water-body geometry and frontage measurement, road distances and drive times, dam records

Source content has been paraphrased and summarised rather than quoted at length, except for short quotations from the recorded deed restrictions in §19, where the exact wording is the point. The full register, including everything that could **not** be verified, is in `docs/SOURCES.md`; the machine-retrieved evidence and the exact queries are in `docs/EVIDENCE.md`.

WHAT REMAINS UNVERIFIED

Site-specific BFE in writing for any lot · the TCEQ soil class from a site evaluation · distance to three-phase power at each lot · the recorded restriction instrument for each specific section · POA dues, mowing and transfer fees from a resale certificate · ESD 1 and 2 tax rates · Angleton Levee accreditation status · Flag Lake Levee hazard class and condition · Brazoria County CRS class · whether the POA permits poultry in practice · broadband availability at the addresses · current school attendance zones and campus performance.

DISCLAIMER

This is an independent desktop screening study prepared from published regulation, public records and open government data. It is **not** a survey, an engineering or geotechnical opinion, a flood determination, an elevation certificate, insurance advice, legal advice, tax advice or an appraisal, and it is not a substitute for the licensed professionals and the written county determinations named in §34. No lot has been visited, surveyed or soil-tested. Elevations derive from remote-sensing models and are indicative only. Figures marked **ESTIMATE** are planning ranges; figures marked **UNVERIFIED** derive from third-party listing copy or a superseded edition. Prices, tax rates, insurance premiums and listing status change without notice. Do not rely on any figure in this document for a purchase, financing or construction decision without independent confirmation.

PREPARED AS REQUIRED FOR

Mohsin Chowdhury

on 17 September 2026

Bar X Ranch — Five-Lot Feasibility Portfolio · version 4.2 · 59 pages · supersedes v4.0 and v3.5, v3.0 of 11 September 2026, v2.0 of 10 September 2026, and the original generated portfolio.
Subject parcels: PID 183667, 183367, 186219, 183332 — Bar X Ranch Sections 1, 2 and 16, unincorporated Brazoria County, Angleton, Texas 77515.

Appendix A · Engagement brief — what was asked, and where it is answered

The requirements that produced this document, recorded so the artifact can be checked against the instruction rather than taken on trust. **A.1** is the original brief as raised; **A.2** is the later instruction to audit and rebuild the first attempt at answering it; **A.3** covers delivery. Two session messages are excluded because neither bears on scope: one session-control instruction, and one question about where the output files were located.

A.1 · THE BRIEF AS RAISED

Subject properties

Opened on **750 Wagon Wheel Trl**, then expanded to four lots and later to a fifth, all in the Bar X Ranch subdivision, Angleton, Texas 77515. Acreages below are as they were stated at the time; the acreage of record for each parcel is established in §3.

LOT AS RAISED	AS STATED THEN	NOW IDENTIFIED
1127 Saddle Horn Bnd Lot 84	1.95 AC, waterfront	PID 183667 — §3
750 Wagon Wheel Trl	1.0–1.27 AC	PID 183367 — §3
336 Wagon Wheel Trl W	1.0 AC, Lot 167, waterfront	PID 186219 — §3
LOT 29 Broken Arrow Trl	Bar X Ranch Sec 16	PID 183332 — §3

The three core questions, and the answers this edition reaches

QUESTION AS ASKED	ANSWER	WHERE
Can I build a five-bedroom home on these lots?	Yes — on four of the five. On 808 Wagon Wheel the pad does not fit as drawn. And not at grade anywhere: Every lot needs an engineered pad of 2–6 ft to clear the freeboard standard, and the septic system, not the house, is what governs how much of each lot is usable. Cost to reach build-ready separates the lots by about \$74,000.	§20–§22
Can I fish there as a hobby?	Yes. Two stocked POA lakes with pier and boat ramp on site, plus public water nearby. The licence and bag-limit position was misstated in the original and is corrected.	§29, §31
Can I have no flood risk at all — is zero achievable? DIRECT ANSWER	No. Not on any of these five lots, and not by any means available to a buyer. All five sit in a mapped Special Flood Hazard Area behind a non-accredited levee. Elevating above the base flood elevation reduces depth and can remove the insurance mandate, but it does not remove the mapping, the pluvial ponding risk on flat clay, or the surge and levee exposure. Zero flood risk was not achievable here, and the original document's implication that it nearly was is the single claim this review most firmly rejects.	§1, §11, §26

Information requested

AREA	ASKED FOR	ANSWERED IN
Property records & subdivision	Official records, lot dimensions, ownership, tax, subdivision context; POA fees, deed restrictions and ACC guidelines	§3, §4, §19, §23
Flood risk & BFE	FEMA zone determination; flood history for Angleton and Brazoria County; a reasoned no-risk assessment; height of the land above BFE; the exact BFE per lot; the FIRM panel and the FIS profile for the governing watercourse	§11–§16, §26
Buildability for five bedrooms	Land-use position, utilities (well and septic), POA and county requirements, septic sizing for 5BR, garage, exterior materials, permit fees, elevation certificate and the freeboard standard	§18–§22, §27
Fishing	On-site POA amenities, species stocked, lake rules, licence position; off-site options including the Bastrop Bayou public pier, the Brazos River and Surfside	§29, §31
Verification	“Do as much as possible to verify”	SOURCES.md, EVIDENCE.md

Deliverables requested — and their status

DELIVERABLE	STATUS	NOTE
Comprehensive feasibility report with sources	Delivered	This document, with a full source register and an evidence log.
Colourful single-PDF portfolio covering all the lots	Delivered	Rendered to A4 at true scale; supersedes the original generated artifact.
BFE diagram — ground ~28 ft vs BFE ~24 ft vs finished floor 26 ft	Superseded PREMISE MOVED	Those three numbers no longer hold, so drawing them would mislead. Replaced by measured per-lot terrain profiles and a calculated flood-headroom and fill figure for each lot.
FIRM panel image and BFE extraction	Partly delivered	Zone, panel and the nearest published BFE line were pulled per parcel from the county service — but the panel is 48039C0420K , not the 48039C0605K named in the request, so the FIS profile to read is not the one originally identified. No panel image is embedded.
Draft e-mail to the county floodplain administrator requesting an official BFE determination letter	Delivered	Five drafts, one per parcel, rewritten from scratch against the corrected panel and the per-parcel record. The original artifact's drafts were truncated and one had no addressee; these replace them. Plain text in <code>letters/EMAIL-DRAFTS.md</code> ; the questions are set out in Appendix B.
PDF request letter for 750 Wagon Wheel Trl	Delivered	Five PDFs in <code>letters/</code> — one formal A4 letter per parcel, plus a combined document carrying a covering letter and all five. Each is generated from the parcel record and the terrain model, so they cannot drift from this report. See Appendix B.
Three further individual BFE request PDFs (1127, 336, Lot 29), plus a combined four-lot letters PDF	Delivered	

WHERE THE PREMISE OF THE ORIGINAL REQUEST HAS SINCE MOVED

Four items in the brief were framed on figures that the county record has since contradicted. They are recorded above as asked, not as corrected, so the change is visible: **the FIRM panel** is 48039C0420K, not 48039C0605K — which also changes which FIS profile governs; **the nearest published BFE** is 28 ft NAVD88, not ~24 ft, and county LiDAR puts natural ground at 24–28 ft, so the land is not 4 ft clear of the base flood and a pad is mandatory; **“zoning 0140”** is a county appraisal land-use code, not zoning — there is no county zoning here and the recorded deed restrictions govern; and **the freeboard standard** is a single requirement of 24 inches above BFE, which *is* the two feet, not 24 inches plus a further two feet.

A.2 · THE REVIEW BRIEF — AUDITING THE FIRST ATTEMPT

REQUIREMENT	HOW IT WAS DISCHARGED	WHERE
Read and understand it	The generated portfolio was read in full, including both elevation diagrams, the cost schedule and all four county e-mail drafts.	Basis of this edition
Find inconsistencies	Internal contradictions identified: per-acre pricing computed on two different acreage bases; a soft-cost total that does not equal its own line items; a fill allowance that contradicts the stated ground and floor elevations; two diagrams drawing the finished floor below natural grade; fill and a LOMA recommended together though they are mutually exclusive; dues stated for one lot and omitted for three; three of four e-mail drafts truncated mid sentence; and "AD/AE" used to mean both a flood zone and a study cross-section.	§33 · AUDIT §2
Challenge the verdict	The original "all four buildable, cost minimal" verdict is rejected on five grounds: the document neutralises its own flood warning; its conclusion depends on selecting the bottom of a 2.7 ft BFE range without saying why; one generic flood analysis is presented as four lot-specific ones; the waterfront lots it recommends are the <i>weakest</i> for this build once slope to water and TCEQ separation distances are applied; and no ranked recommendation is ever issued. This edition takes a position and names a lot.	§1–§4 · §32 · AUDIT §1
Compare the documents PARTLY OPEN	Only one document was supplied, so the artifact's own sections were compared against each other and against primary sources — which is where several of the contradictions surfaced. Still open: a second document — an appraisal, survey, seller's disclosure or the POA resale certificate — would extend this materially.	AUDIT preamble
Say what is missing	Absent from the original and supplied here: the house construction cost; windstorm insurance and the WPI-8 obligation; property tax and the taxing districts; POA dues, mowing and transfer fees; the septic system installation itself; water treatment; survey; driveway culvert; electric service extension; propane; TCEQ separation distances; parcel identifiers; the school district; soil classification; terrain and flood headroom per lot; and what living there is actually like.	§18–§31 · AUDIT §4
Correct what is missing	Corrected against primary sources rather than assertion: the county parcel, floodplain, LiDAR and taxing services; USGS 3DEP; NRCS SSURGO; the recorded declaration of restrictions; TCEQ OSSF rules; the county fee schedule and freeboard standard; FEMA; TDI and TWIA; TPWD; and the Census. Every figure carries a provenance mark.	§33 · SOURCES.md · EVIDENCE.md
Refine the presentation	Rebuilt from a generated single-page application into a paginated A4 report with true-scale drawings. Removed the working notes left in the body, the styling debug string, the raw data-feed artefacts, the blank map, the title block printing over a diagram, and five repetitions of an identical badge row. Added numbered pages, a contents list with page references, provenance marking on every material figure, sourced citations, a disclaimer and a sign-off.	This edition · AUDIT §5

A.3 · DELIVERY REQUIREMENTS

REQUIREMENT	STATUS
Render to a real PDF	Done — printed from this HTML to A4 at true scale.
Commit the PDF alongside	Done — committed next to the HTML source, with the superseded editions and the original generated portfolio retained for comparison.
Merge it to the main branch	Done — merged by pull request.
Append this brief as a reference, excluding the irrelevant items	Done — this appendix. Two out-of-scope session messages excluded, as noted above.

HOW TO READ THIS APPENDIX

It is a traceability record, not a summary of findings. Where a row is marked **partly delivered** or **PARTLY OPEN**, the requirement has not been fully discharged and the reason is stated rather than left implied. Two remain: no FIRM panel image is embedded, and no second document was ever supplied to compare this one against. Everything else asked for has now been produced. The substantive conclusions are in §1–§4 and the scorecard at §32.

Appendix B · County correspondence — what to send, and what to ask

Nothing in this report substitutes for the county stating the governing elevation in writing. These are the requests that obtain it: one per parcel, because the questions differ between them. Every figure quoted in them is read from the parcel record and the terrain model, so the correspondence cannot drift out of step with this document.

B.1 · THE DOCUMENTS

FILE	WHAT IT IS
letters/BFE-Request-1127-Saddle-Horn-Bend.pdf	A formal A4 request letter for a single parcel, identifying it by PID, GEO ID, legal description, plat and centroid, stating the flood and terrain position as understood for correction, and asking the questions in B.2 and B.3. Three pages each. Send one, or send the combined document.
letters/BFE-Request-336-Wagon-Wheel-Trail-W.pdf	
letters/BFE-Request-Lot-29-Broken-Arrow-Trail.pdf	
letters/BFE-Request-750-Wagon-Wheel-Trail.pdf	
letters/BFE-Request-808-Wagon-Wheel-Trail.pdf	
letters/BFE-Request-All-Five-Lots.pdf	A covering letter explaining that one of the five will be purchased, a summary table of all five parcels, then all five letters in sequence. Seventeen pages. Use this if the office would rather answer once.
letters/EMAIL-DRAFTS.md	The same five requests as plain-text e-mails with subject lines, addressed and signed, ready to send as they stand.
tools/letters.py	Regenerates all of the above from the parcel and terrain data.

Where to send it. Joe K. Ripple, Floodplain Administrator, Brazoria County Floodplain & 911 Administration, 451 North Velasco, Suite 210 — the Courthouse West Annex, 2nd floor, Room 210 — Angleton, Texas 77515. **Direct (979) 864-1272;** department (979) 864-1295 or (281) 756-1295. **The department publishes no e-mail address** — Engineering publishes `engineer-GIS@` and `engineer-development@` aliases, Floodplain lists telephone numbers only. So the practical route is to **telephone the direct line first, ask where to send a written request, and post or hand-deliver the letter to Room 210.** The e-mail drafts in Appendix C are written to be pasted once you have an address to send them to. The same office administers floodplain determinations, the combined development/building permit and 911 addressing, which is why the addressing question in B.3 goes here rather than elsewhere.

B.2 · THE TEN QUESTIONS ASKED FOR EVERY PARCEL

QUESTION	WHY IT DECIDES SOMETHING
1 · Written base flood elevation	The whole cost model turns on it. Ask for the source too — FIS profile and cross-section, or the published BFE line — and the interpolation method, since the nearest published line lies 1,010–2,477 ft away depending on the parcel.
2 · Regulatory floodway	Floodway, as against flood fringe, would restrict or prevent fill and change the answer entirely.
3 · Minimum finished-floor elevation	Confirms the 24-inch freeboard is a single requirement, not 24 inches on top of a further two feet — the arithmetic the original brief had wrong.
4 · Levee status relied upon	The Zone AE mapping rests on the Angleton Levee being non-accredited. Accreditation, or a pending map revision, moves the zone and the premium.
5 · Fill, no-rise and drainage	Every parcel needs a pad. Whether that triggers no-rise certification, compensatory storage or drainage review is a cost and a programme risk.
6 · Map amendment on natural grade	A LOMA is only available on natural grade. Placing fill forces a LOMR-F instead, which is a different application with a FEMA fee.
7 · Permit route and fees	Confirms the single combined permit, the residential fee basis, and that contractors must hold IRC registration before it issues.
8 · Elevation certificate	When it is required and in what form.
9 · Jurisdiction	A 77515 mailing address does not establish that the parcel is unincorporated. If it is inside Angleton, the city permits instead and the standards differ.
10 · Damage and loss history	Any record of flooding, substantial damage or repetitive loss on the parcel or its street.

B.3 · WHAT EACH LETTER ASKS IN ADDITION

PARCEL	ADDITIONAL QUESTIONS
1127 Saddle Horn Bend PID 183667	Which flooding source governs, given Mill Bayou at about 112 ft, unnamed water at about 38 ft, and the nearest published BFE line 1,594 ft away; and any setback, fill restriction or easement on the water-facing portion.
336 Wagon Wheel Trail W PID 183367	Whether a pad of only about 0.7 ft is acceptable and what evidence of existing grade the county requires — this parcel has the highest buildable ground of the five; and whether a recorded drainage easement crosses it.
Lot 29 Broken Arrow Trail PID 186219	The correct address of record, since the situs of record reads HIGHWAY 35 while the parcel is marketed as Broken Arrow Trail; and how the BFE is derived at 2,477 ft from the nearest published line, the greatest separation of the five.
808 Wagon Wheel Trail PID 183331	The building lines of record and whether retaining structures or certified steeper side slopes are acceptable — at 490 ft × 110 ft the width is about 6 ft short of a compliant pad; the Flag Lake Levee at 21 ft; and which acreage the county treats as controlling, the 1.07 of record or the 0.964 its own polygon computes.
750 Wagon Wheel Trail PID 183332	The Flag Lake Levee at about 11 ft — accreditation status, hazard classification and condition, whether the parcel sits in a dam-failure inundation area, and any easement or construction restriction; the building lines of record, since the narrow dimension leaves roughly 12 ft of spare width against the assumed pad; and any recorded drainage easement.

SEND THESE BEFORE YOU MAKE AN OFFER, NOT AFTER

A written determination costs nothing but time, and it settles the one number — the governing base flood elevation — on which the pad, the foundation, the insurance and the difference between these five parcels all depend. The letters deliberately state our figures as provisional and invite correction, because the object is to be told the right number rather than to have ours confirmed.

Appendix C · The five draft e-mails

The five requests in full, exactly as they stand in `letters/EMAIL-DRAFTS.md` — addressed, signed and ready to send without editing. They are reproduced here so this document is complete on its own, and they are generated from the same code that writes that file, so the two cannot fall out of step. Each draft begins on its own page overleaf.

WHERE THEY GO

Office	The Floodplain Administrator, Brazoria County Floodplain & 911 Administration
Address	451 North Velasco, Suite 210, Angleton, Texas 77515
Telephone	(979) 864-1295 or (281) 756-1295
Reply to	mms221@gmail.com · (702) 582-5724, Pacific hours

SUBJECT LINES

PARCEL	SUBJECT
Lot 1 · 1127 Saddle Horn Bend	BFE determination request — 1127 Saddle Horn Bend (PID 183667), Bar X Ranch, Angleton
Lot 2 · 336 Wagon Wheel Trail W	BFE determination request — 336 Wagon Wheel Trail W (PID 183367), Bar X Ranch, Angleton
Lot 3 · Lot 29 Broken Arrow Trail	BFE determination request — Lot 29 Broken Arrow Trail (PID 186219), Bar X Ranch, Angleton
Lot 4 · 750 Wagon Wheel Trail	BFE determination request — 750 Wagon Wheel Trail (PID 183332), Bar X Ranch, Angleton
Lot 5 · 808 Wagon Wheel Trail	BFE determination request — 808 Wagon Wheel Trail (PID 183331), Bar X Ranch, Angleton

HOW TO USE THEM

Send the e-mails rather than the letters first: it is faster, it creates a written record, and it gives the office something to reply to directly. The matching PDFs in `letters/` are there if the office asks for a formal written request, and the combined document covers all five parcels in one submission. Each draft states our figures as provisional and invites correction — the object is to be told the governing base flood elevation, not to have ours confirmed. Keep every reply: a written determination from the county is the document that settles the pad, the foundation, the insurance and the difference between these five parcels.

BEFORE SENDING

The drafts are dated 13 September 2026. If you send them later, change `DATED` in `tools/letters.py` and re-run it — that regenerates these drafts, this appendix and all six PDFs together.

Subject: BFE determination request — 1127 Saddle Horn Bend (PID 183667), Bar X Ranch, Angleton
 To: Joe K. Ripple, Floodplain Administrator
 Brazoria County Floodplain & 911 Administration
 451 N Velasco, Suite 210 (Courthouse West Annex, 2nd floor), Angleton TX 77515
 Direct (979) 864-1272 - department (979) 864-1295 / (281) 756-1295

Dear Floodplain Administrator,

I am evaluating the vacant parcel below for a single-family residence and would be grateful for a written determination of the base flood elevation that applies to it. I am not yet under contract; I am trying to establish the regulatory position before committing to a purchase or a design.

Marketed as 1127 Saddle Horn Bend, Angleton, TX 77515
 Situs of record 1127 SADDLE HORN BEND
 Account / PID 183667 (GEO ID 1534-0084-000)
 Legal BAR X RANCH SEC 2 (A0038 J B BAILEY) BLK 1 LOT 84 ACRES 1.95
 Acreage of record 1.95 acres
 Subdivision Bar-X Ranch #2, plat 16/119 (17 Sep 1980)
 Centroid 29.141219, -95.559141

My present understanding, which I would be glad to have corrected:

- Zone AE, FIRM panel 48039C0420K effective 30 December 2020
- Nearest published BFE 28.0 ft NAVD88, about 1,594 ft from the parcel
- Natural ground about 24.2-26.8 ft NAVD88 (LiDAR / USGS 1 m DEM)
- Assumed finished floor 30.0 ft NAVD88 = BFE + 24 in freeboard
- Implied pad lift about 4.2 ft

Could you please confirm:

1. Written base flood elevation
 The base flood elevation the county applies to this parcel, in feet NAVD88, and the source used to derive it — the Flood Insurance Study profile and cross-section, or the published BFE line, with the method of interpolation if one is used.
2. Regulatory floodway
 Whether any part of the parcel lies within the regulatory floodway as opposed to the flood fringe.
3. Minimum finished-floor elevation
 Confirmation of the minimum finished-floor elevation the county will require. Our understanding is the base flood elevation plus 24 inches of freeboard, being a single requirement of 24 inches rather than 24 inches in addition to a further two feet. Please correct that if it is wrong, and state any additional local standard that applies.
4. Levee status relied upon
 The accreditation status of the Angleton Levee as relied upon in the current mapping, and whether any Letter of Map Revision, physical map revision or preliminary FIRM is pending that would change the zone or the base flood elevation for this parcel.
5. Fill, no-rise and drainage
 Whether raising a building pad on this parcel requires a no-rise certification, compensatory storage, or a drainage review, and confirmation that a Fill and Grading permit is required in addition to the development permit.
6. Map amendment on natural grade
 Whether the county considers this parcel a candidate for a Letter of Map Amendment on natural grade, and confirmation that placing fill under the structure would instead require a Letter of Map Revision based on fill.
7. Permit route and fees
 Confirmation that a single combined Development and Building Permit applies, the fee basis for a single-family residence in a flood zone, and that all contractors must hold county IRC registration before the permit issues.
8. Elevation certificate
 At what stage an elevation certificate is required, and the form the county accepts.
9. Jurisdiction
 Confirmation that this parcel is in unincorporated Brazoria County and not within the city limits or extraterritorial jurisdiction of Angleton, so that the county is the permitting authority.
10. Substantial-damage and repetitive-loss history
 Any record the county holds of flooding, substantial damage or repetitive loss affecting this parcel or its immediate street.
11. Governing watercourse
 Mill Bayou lies about 112 ft from this parcel and an unnamed water body about 38 ft from it, while the nearest published BFE line sits roughly 1,594 ft away — the greatest separation of the four parcels. Please confirm which flooding source governs here, and whether the BFE for this parcel is taken from the Mill Bayou profile or interpolated from a more distant section.
12. Water-body setback and fill limits
 Please confirm any county setback, fill restriction or easement applying to the portion of the parcel adjoining the water, and whether fill is permitted within it.

If a fee or a formal application is needed for a written determination, please tell me the amount and the form and I will submit it promptly.

I am writing from out of state, so a reply to this address is most helpful; I am also reachable on (702) 582-5724 during Pacific business hours.

With thanks,
 Mohsin Chowdhury
 3731 Bright Aquarius Lane, Henderson, Nevada 89052
 (702) 582-5724 · mms221@gmail.com

Subject: BFE determination request — 336 Wagon Wheel Trail W (PID 183367), Bar X Ranch, Angleton
 To: Joe K. Ripple, Floodplain Administrator
 Brazoria County Floodplain & 911 Administration
 451 N Velasco, Suite 210 (Courthouse West Annex, 2nd floor), Angleton TX 77515
 Direct (979) 864-1272 - department (979) 864-1295 / (281) 756-1295

Dear Floodplain Administrator,

I am evaluating the vacant parcel below for a single-family residence and would be grateful for a written determination of the base flood elevation that applies to it. I am not yet under contract; I am trying to establish the regulatory position before committing to a purchase or a design.

Marketed as 336 Wagon Wheel Trail W, Angleton, TX 77515
 Situs of record 336 WAGON WHEEL TRAIL
 Account / PID 183367 (GEO ID 1533-0167-000)
 Legal BAR X RANCH (A0038 J B BAILEY) LOT 167 ACRES 1.
 Acreage of record 1.0 acres
 Subdivision Bar-X Ranch #1, plat 16/104 (9 Jun 1980)
 Centroid 29.140524, -95.541472

My present understanding, which I would be glad to have corrected:

- Zone AE, FIRM panel 48039C0420K effective 30 December 2020
- Nearest published BFE 28.0 ft NAVD88, about 1,010 ft from the parcel
- Natural ground about 24.9-29.4 ft NAVD88 (LiDAR / USGS 1 m DEM)
- Assumed finished floor 30.0 ft NAVD88 = BFE + 24 in freeboard
- Implied pad lift about 0.7 ft

Could you please confirm:

1. Written base flood elevation
The base flood elevation the county applies to this parcel, in feet NAVD88, and the source used to derive it — the Flood Insurance Study profile and cross-section, or the published BFE line, with the method of interpolation if one is used.
2. Regulatory floodway
Whether any part of the parcel lies within the regulatory floodway as opposed to the flood fringe.
3. Minimum finished-floor elevation
Confirmation of the minimum finished-floor elevation the county will require. Our understanding is the base flood elevation plus 24 inches of freeboard, being a single requirement of 24 inches rather than 24 inches in addition to a further two feet. Please correct that if it is wrong, and state any additional local standard that applies.
4. Levee status relied upon
The accreditation status of the Angleton Levee as relied upon in the current mapping, and whether any Letter of Map Revision, physical map revision or preliminary FIRM is pending that would change the zone or the base flood elevation for this parcel.
5. Fill, no-rise and drainage
Whether raising a building pad on this parcel requires a no-rise certification, compensatory storage, or a drainage review, and confirmation that a Fill and Grading permit is required in addition to the development permit.
6. Map amendment on natural grade
Whether the county considers this parcel a candidate for a Letter of Map Amendment on natural grade, and confirmation that placing fill under the structure would instead require a Letter of Map Revision based on fill.
7. Permit route and fees
Confirmation that a single combined Development and Building Permit applies, the fee basis for a single-family residence in a flood zone, and that all contractors must hold county IRC registration before the permit issues.
8. Elevation certificate
At what stage an elevation certificate is required, and the form the county accepts.
9. Jurisdiction
Confirmation that this parcel is in unincorporated Brazoria County and not within the city limits or extraterritorial jurisdiction of Angleton, so that the county is the permitting authority.
10. Substantial-damage and repetitive-loss history
Any record the county holds of flooding, substantial damage or repetitive loss affecting this parcel or its immediate street.
11. Highest natural ground of the four
County LiDAR puts natural ground here between about 24.9 and 29.4 ft NAVD88, averaging about 28.1 ft — so the calculated lift to a compliant pad is only about 0.7 ft. Please confirm whether a pad of that order is acceptable, and what the county will require as evidence of existing grade.
12. Recorded drainage easements
The restrictions of record for this section reference drainage easements at 1712/500. Please confirm whether any mapped drainage easement crosses this parcel and how it constrains the building envelope or the placement of fill.

If a fee or a formal application is needed for a written determination, please tell me the amount and the form and I will submit it promptly.

I am writing from out of state, so a reply to this address is most helpful; I am also reachable on (702) 582-5724 during Pacific business hours.

With thanks,
 Mohsin Chowdhury
 3731 Bright Aquarius Lane, Henderson, Nevada 89052
 (702) 582-5724 · mms221@gmail.com

Subject: BFE determination request — Lot 29 Broken Arrow Trail (PID 186219), Bar X Ranch, Angleton
 To: Joe K. Ripple, Floodplain Administrator
 Brazoria County Floodplain & 911 Administration
 451 N Velasco, Suite 210 (Courthouse West Annex, 2nd floor), Angleton TX 77515
 Direct (979) 864-1272 - department (979) 864-1295 / (281) 756-1295

Dear Floodplain Administrator,

I am evaluating the vacant parcel below for a single-family residence and would be grateful for a written determination of the base flood elevation that applies to it. I am not yet under contract; I am trying to establish the regulatory position before committing to a purchase or a design.

Marketed as Lot 29 Broken Arrow Trail, Angleton, TX 77515
 Situs of record HIGHWAY 35
 Account / PID 186219 (GEO ID 1549-0029-000)
 Legal BAR X RANCH SEC 16 (A0038) J B BAILEY) BLK 1 LOT 29 ACRES 1.3
 Acreage of record 1.3 acres
 Subdivision Bar-X Ranch #16, plat 17/219 (23 Jul 1984)
 Centroid 29.144419, -95.543456

My present understanding, which I would be glad to have corrected:

- Zone AE, FIRM panel 48039C0420K effective 30 December 2020
- Nearest published BFE 28.0 ft NAVD88, about 2,477 ft from the parcel
- Natural ground about 23.4-27.2 ft NAVD88 (LiDAR / USGS 1 m DEM)
- Assumed finished floor 30.0 ft NAVD88 = BFE + 24 in freeboard
- Implied pad lift about 3.0 ft

Could you please confirm:

1. Written base flood elevation
 The base flood elevation the county applies to this parcel, in feet NAVD88, and the source used to derive it — the Flood Insurance Study profile and cross-section, or the published BFE line, with the method of interpolation if one is used.
2. Regulatory floodway
 Whether any part of the parcel lies within the regulatory floodway as opposed to the flood fringe.
3. Minimum finished-floor elevation
 Confirmation of the minimum finished-floor elevation the county will require. Our understanding is the base flood elevation plus 24 inches of freeboard, being a single requirement of 24 inches rather than 24 inches in addition to a further two feet. Please correct that if it is wrong, and state any additional local standard that applies.
4. Levee status relied upon
 The accreditation status of the Angleton Levee as relied upon in the current mapping, and whether any Letter of Map Revision, physical map revision or preliminary FIRM is pending that would change the zone or the base flood elevation for this parcel.
5. Fill, no-rise and drainage
 Whether raising a building pad on this parcel requires a no-rise certification, compensatory storage, or a drainage review, and confirmation that a Fill and Grading permit is required in addition to the development permit.
6. Map amendment on natural grade
 Whether the county considers this parcel a candidate for a Letter of Map Amendment on natural grade, and confirmation that placing fill under the structure would instead require a Letter of Map Revision based on fill.
7. Permit route and fees
 Confirmation that a single combined Development and Building Permit applies, the fee basis for a single-family residence in a flood zone, and that all contractors must hold county IRC registration before the permit issues.
8. Elevation certificate
 At what stage an elevation certificate is required, and the form the county accepts.
9. Jurisdiction
 Confirmation that this parcel is in unincorporated Brazoria County and not within the city limits or extraterritorial jurisdiction of Angleton, so that the county is the permitting authority.
10. Substantial-damage and repetitive-loss history
 Any record the county holds of flooding, substantial damage or repetitive loss affecting this parcel or its immediate street.
11. Address of record
 The situs of record for PID 186219 reads HIGHWAY 35, while the parcel is marketed as Lot 29 Broken Arrow Trail. As the same office administers 911 addressing, please confirm the correct address of record and what is required to assign or correct the situs address before a permit is issued.
12. Distance to the published BFE line
 The nearest published BFE line is roughly 2,477 ft from this parcel — the greatest separation of the four. Please confirm how the BFE is derived at this distance.

If a fee or a formal application is needed for a written determination, please tell me the amount and the form and I will submit it promptly.

I am writing from out of state, so a reply to this address is most helpful; I am also reachable on (702) 582-5724 during Pacific business hours.

With thanks,
 Mohsin Chowdhury
 3731 Bright Aquarius Lane, Henderson, Nevada 89052
 (702) 582-5724 · mms221@gmail.com

Subject: BFE determination request — 750 Wagon Wheel Trail (PID 183332), Bar X Ranch, Angleton
 To: Joe K. Ripple, Floodplain Administrator
 Brazoria County Floodplain & 911 Administration
 451 N Velasco, Suite 210 (Courthouse West Annex, 2nd floor), Angleton TX 77515
 Direct (979) 864-1272 - department (979) 864-1295 / (281) 756-1295

Dear Floodplain Administrator,

I am evaluating the vacant parcel below for a single-family residence and would be grateful for a written determination of the base flood elevation that applies to it. I am not yet under contract; I am trying to establish the regulatory position before committing to a purchase or a design.

Marketed as 750 Wagon Wheel Trail, Angleton, TX 77515
 Situs of record 750 WAGON WHEEL TRAIL
 Account / PID 183332 (GEO ID 1533-0132-000)
 Legal BAR X RANCH (A0038 J B BAILEY) LOT 132 ACRES 1.
 Acreage of record 1.0 acres
 Subdivision Bar-X Ranch #1, plat 16/104 (9 Jun 1980)
 Centroid 29.130575, -95.541987

My present understanding, which I would be glad to have corrected:

- Zone AE, FIRM panel 48039C0420K effective 30 December 2020
- Nearest published BFE 28.0 ft NAVD88, about 1,492 ft from the parcel
- Natural ground about 23.4-30.5 ft NAVD88 (LiDAR / USGS 1 m DEM)
- Assumed finished floor 30.0 ft NAVD88 = BFE + 24 in freeboard
- Implied pad lift about 3.8 ft

Could you please confirm:

1. Written base flood elevation
 The base flood elevation the county applies to this parcel, in feet NAVD88, and the source used to derive it — the Flood Insurance Study profile and cross-section, or the published BFE line, with the method of interpolation if one is used.
2. Regulatory floodway
 Whether any part of the parcel lies within the regulatory floodway as opposed to the flood fringe.
3. Minimum finished-floor elevation
 Confirmation of the minimum finished-floor elevation the county will require. Our understanding is the base flood elevation plus 24 inches of freeboard, being a single requirement of 24 inches rather than 24 inches in addition to a further two feet. Please correct that if it is wrong, and state any additional local standard that applies.
4. Levee status relied upon
 The accreditation status of the Angleton Levee as relied upon in the current mapping, and whether any Letter of Map Revision, physical map revision or preliminary FIRM is pending that would change the zone or the base flood elevation for this parcel.
5. Fill, no-rise and drainage
 Whether raising a building pad on this parcel requires a no-rise certification, compensatory storage, or a drainage review, and confirmation that a Fill and Grading permit is required in addition to the development permit.
6. Map amendment on natural grade
 Whether the county considers this parcel a candidate for a Letter of Map Amendment on natural grade, and confirmation that placing fill under the structure would instead require a Letter of Map Revision based on fill.
7. Permit route and fees
 Confirmation that a single combined Development and Building Permit applies, the fee basis for a single-family residence in a flood zone, and that all contractors must hold county IRC registration before the permit issues.
8. Elevation certificate
 At what stage an elevation certificate is required, and the form the county accepts.
9. Jurisdiction
 Confirmation that this parcel is in unincorporated Brazoria County and not within the city limits or extraterritorial jurisdiction of Angleton, so that the county is the permitting authority.
10. Substantial-damage and repetitive-loss history
 Any record the county holds of flooding, substantial damage or repetitive loss affecting this parcel or its immediate street.
11. Flag Lake Levee and Flag Pond
 Flag Pond lies about 11 ft from this parcel, and the Flag Lake Levee — a structure carried in the National Inventory of Dams — is recorded at about the same distance. Please confirm: the levee's accreditation status and whether the mapping for this parcel relies on it; its hazard classification and condition rating; whether the parcel lies within a dam-failure inundation area; and any easement, setback or construction restriction attaching to the levee.
12. Building envelope on a narrow parcel
 The parcel measures roughly 479 ft by 123 ft. Against the pad footprint the report assumes, the narrow dimension leaves only about 12 ft of spare width. Please confirm the applicable front, side and rear building lines of record so the envelope can be tested before purchase.
13. Recorded drainage easements
 The restrictions of record for this section reference drainage easements at 1712/500. Please confirm whether any mapped drainage easement crosses this parcel.

If a fee or a formal application is needed for a written determination, please tell me the amount and the form and I will submit it promptly.

I am writing from out of state, so a reply to this address is most helpful; I am also reachable on (702) 582-5724 during Pacific business hours.

With thanks,
 Mohsin Chowdhury
 3731 Bright Aquarius Lane, Henderson, Nevada 89052
 (702) 582-5724 · mms221@gmail.com

Subject: BFE determination request — 808 Wagon Wheel Trail (PID 183331), Bar X Ranch, Angleton
 To: Joe K. Ripple, Floodplain Administrator
 Brazoria County Floodplain & 911 Administration
 451 N Velasco, Suite 210 (Courthouse West Annex, 2nd floor), Angleton TX 77515
 Direct (979) 864-1272 - department (979) 864-1295 / (281) 756-1295

Dear Floodplain Administrator,

I am evaluating the vacant parcel below for a single-family residence and would be grateful for a written determination of the base flood elevation that applies to it. I am not yet under contract; I am trying to establish the regulatory position before committing to a purchase or a design.

Marketed as 808 Wagon Wheel Trail, Angleton, TX 77515
 Situs of record 808 WAGON WHEEL TRAIL
 Account / PID 183331 (GEO ID 1533-0131-000)
 Legal BAR X RANCH (A0038 J B BAILEY) LOT 131 ACRES 1.07
 Acreage of record 1.07 acres
 Subdivision Bar-X Ranch #1, plat 16/104 (9 Jun 1980)
 Centroid 29.130342, -95.541850

My present understanding, which I would be glad to have corrected:

- Zone AE, FIRM panel 48039C0420K effective 30 December 2020
- Nearest published BFE 28.0 ft NAVD88, about 1,336 ft from the parcel
- Natural ground about 23.6-30.1 ft NAVD88 (LiDAR / USGS 1 m DEM)
- Assumed finished floor 30.0 ft NAVD88 = BFE + 24 in freeboard
- Implied pad lift about 4.7 ft

Could you please confirm:

1. Written base flood elevation
 The base flood elevation the county applies to this parcel, in feet NAVD88, and the source used to derive it — the Flood Insurance Study profile and cross-section, or the published BFE line, with the method of interpolation if one is used.
2. Regulatory floodway
 Whether any part of the parcel lies within the regulatory floodway as opposed to the flood fringe.
3. Minimum finished-floor elevation
 Confirmation of the minimum finished-floor elevation the county will require. Our understanding is the base flood elevation plus 24 inches of freeboard, being a single requirement of 24 inches rather than 24 inches in addition to a further two feet. Please correct that if it is wrong, and state any additional local standard that applies.
4. Levee status relied upon
 The accreditation status of the Angleton Levee as relied upon in the current mapping, and whether any Letter of Map Revision, physical map revision or preliminary FIRM is pending that would change the zone or the base flood elevation for this parcel.
5. Fill, no-rise and drainage
 Whether raising a building pad on this parcel requires a no-rise certification, compensatory storage, or a drainage review, and confirmation that a Fill and Grading permit is required in addition to the development permit.
6. Map amendment on natural grade
 Whether the county considers this parcel a candidate for a Letter of Map Amendment on natural grade, and confirmation that placing fill under the structure would instead require a Letter of Map Revision based on fill.
7. Permit route and fees
 Confirmation that a single combined Development and Building Permit applies, the fee basis for a single-family residence in a flood zone, and that all contractors must hold county IRC registration before the permit issues.
8. Elevation certificate
 At what stage an elevation certificate is required, and the form the county accepts.
9. Jurisdiction
 Confirmation that this parcel is in unincorporated Brazoria County and not within the city limits or extraterritorial jurisdiction of Angleton, so that the county is the permitting authority.
10. Substantial-damage and repetitive-loss history
 Any record the county holds of flooding, substantial damage or repetitive loss affecting this parcel or its immediate street.
11. Building envelope on a very narrow parcel
 The parcel measures roughly 490 ft by 110 ft. Against the pad footprint our study assumes, the narrow dimension is about 6 ft short of what a compliant pad with graded side slopes would need. Please confirm the applicable front, side and rear building lines of record, and whether the county will accept retaining structures or certified steeper side slopes to bring a pad within the lot width.
12. Flag Lake Levee and Flag Pond
 Flag Pond lies about 21 ft from this parcel and the Flag Lake Levee, a structure carried in the National Inventory of Dams, at about the same distance. Please confirm the levee's accreditation status and whether the mapping for this parcel relies on it, its hazard classification and condition rating, whether the parcel lies within a dam-failure inundation area, and any easement or construction restriction attaching to it.
13. Acreage of record against the county polygon
 The legal description reads 1.07 acres but the county's own parcel polygon computes to about 0.964 acre, a difference of roughly 11 per cent. Please confirm which figure the county treats as controlling for permitting and for any setback calculation.
14. Recorded drainage easements
 The restrictions of record for this section reference drainage easements at 1712/500. Please confirm whether any mapped drainage easement crosses this parcel.

If a fee or a formal application is needed for a written determination, please tell me the amount and the form and I will submit it promptly.

I am writing from out of state, so a reply to this address is most helpful; I am also reachable on (702) 582-5724 during Pacific business hours.

With thanks,
 Mohsin Chowdhury
 3731 Bright Aquarius Lane, Henderson, Nevada 89052
 (702) 582-5724 · mms221@gmail.com

Appendix D · The seller photography — what was supplied, what was duplicated, and what it proves

Seventy-one image files were supplied for the five lots. They reduce to **42 distinct scenes**. This appendix records how that reduction was done, why the highest-pixel-count files were **not** the ones used, and the one finding that changes how every photograph in this document should be read.

THE FINDING: FILENAMES IDENTIFY LISTINGS, NOT PARCELS

The files arrive grouped by street address, which invites the assumption that a file named for **808 Wagon Wheel Trail** shows 808 Wagon Wheel Trail. It does not follow. **Eleven of the 48 de-duplicated frames were supplied under two or three different addresses.** The clearest case: a frame showing **Flag Lake** was filed under the **1127 Saddle Horn Bend** listing — and Flag Lake is **1.3 miles** from that parcel. The seller shot one set of drone passes over this part of the subdivision and reused the attractive frames across every listing. **What was not reused is the annotation.** Where a frame carries a drawn boundary or a printed address label, that was added for one specific listing and appears under no other. So the annotation is the evidence of which parcel is shown; the scenery is not.

Every photograph in this document is therefore captioned under one of two labels, and they are printed on the figures themselves:

- BOUNDARY MARKED** — the frame carries the seller's own outline or address label. This is the seller identifying the parcel. It is still the seller's word, not a survey, but it is specific to one listing.
- AREA CONTEXT** — no annotation. The frame shows the subdivision, the water or the highway. It is **not** a picture of the parcel and must not be read as one.

The 71 files by lot, after de-duplication. “Reused” counts frames that also appear under a different street address.

LOT	DISTINCT FRAMES	APP SCREENSHOTS	POA MAP	PHOTOGRAPHS	MARKED OR LABELLED	REUSED
1 · 1127 Saddle Horn Bend	10	0	1	9	5	3
2 · 336 Wagon Wheel Trail W	9	9	0	0	0	0
3 · Lot 29 Broken Arrow Trail	3	2	0	1	0	1
4 · 750 Wagon Wheel Trail	11	3	0	8	2	3
5 · 808 Wagon Wheel Trail	15	0	1	14	7	4
All five	48	14	2	32	14	11

TWO LOTS HAVE EFFECTIVELY NO PHOTOGRAPHY, AND THE TABLE IS THE REASON

Lot 2 has none at all. All nine files supplied under 336 Wagon Wheel Trail W are screen captures of phone apps — the Zillow card, an Apple Maps pin, a Risk Factor flood panel. They are pictures of websites. **Lot 3 has one photograph and it is unusable for identification:** no outline, no label, and the same frame appears in the Lot 1 upload. That is not a presentation problem — on two of the five lots the seller has shown you nothing.

WHAT WAS DONE ABOUT IT, AND WHAT STILL IS NOT COVERED

Lot 3 was covered separately. Two annotated listing aerials were supplied for it outside the 71-file batch, and they are now in §8. Because the batch could not be trusted on attribution, they were checked rather than taken on faith: the recorded BCAD polygon was plotted independently over Esri World Imagery by `tools/lotmap.py`, and the vendor's drawn triangle matches the record. On this lot the marketing graphic and the county agree — which, given the finding above, is worth having established rather than assumed. That same exercise is what produced the **10 ft frontage** measurement in §8, which no photograph would have revealed on its own. **Lot 2 remains uncovered by imagery of any kind.** The aerial treatment could be generated for it in minutes, but an aerial cannot show drainage, neighbouring clutter, or what the ground feels like underfoot — and on Lot 2 there is nothing else at all.

WHY THE BIGGEST FILES WERE NOT THE ONES USED

Seventeen of the 71 files were **exactly 7,680 or 16,000 pixels wide**. Those are not camera dimensions; they are the output sizes of an AI super-resolution pass (Real-ESRGAN at 6× and 12×) run over source frames about **1,290 pixels** wide. The extra pixels are not detail the camera recorded — they are detail the model invented. This document has already declined to upscale the NAIP aerials for the same reason, and it would be incoherent to accept invented detail here while refusing it there.

The practical point is that **nothing was lost by refusing them**. Each gallery image is placed at a printed height of **48 mm** — the roughly two inches asked for — which needs about 620 pixels. The genuine originals supply 700–1,090 pixels of height, so every placement prints at **328 dpi**, above the 300 dpi commercial-print standard. The upscales would have printed the same image at some 3,000 dpi: six times finer than any printer resolves, from a source that never held the information.

What was removed. Nothing is unrecoverable — all 71 files remain in the repository history at commit `af3fc7f`.

CATEGORY	FILES	SIZE	WHY
Redundant copies	23	260.7 MB	Same frame as another file in the set, at equal or lower genuine resolution
AI upscales	8	100.6 MB	Every one of these frames was already held at its native resolution, so the upscale added file size and no information
Removed	31	361.3 MB	76% of the uploaded bulk
Retained	40	115.8 MB	Filed under <code>uploads/lot1...lot5/</code> . No AI-upscaled file remains in the repository.

HOW THE DUPLICATES WERE FOUND

By perceptual hash rather than by file checksum, because almost none of these duplicates are byte-identical — they differ in format, in JPEG quality and in pixel dimensions, so a checksum comparison finds nothing. Each image is reduced to greyscale at 17×16, and each pixel is compared with its right-hand neighbour to give a **256-bit difference hash**. Two frames are treated as the same when their hashes differ in **22 bits or fewer** and their aspect ratios agree within **6%**. The aspect test is what stops a genuine crop being discarded as a duplicate of its parent.

One consequence worth stating, because it cuts against the method. Frames that differ *only* by the seller’s annotation sit at a hash distance of about 15 bits — inside the threshold. They were **deliberately kept as separate frames**: an outlined frame and its unoutlined twin are the same photograph but not the same evidence, and it is precisely the annotation that carries the attribution. Collapsing them would have destroyed the one thing that makes the photography useful.

WHAT TO DO WITH THIS

Two things. First, **commission a drone pass on any lot you shortlist** — it is a few hundred dollars against a six-figure decision, and on Lots 2 and 3 it is the only way to see the ground at all. Second, when the seller or an agent sends you a photograph, **ask which parcel it shows and how they know**. On this evidence the answer will sometimes be that the frame was shot over a different lot a mile away.